


06.2025

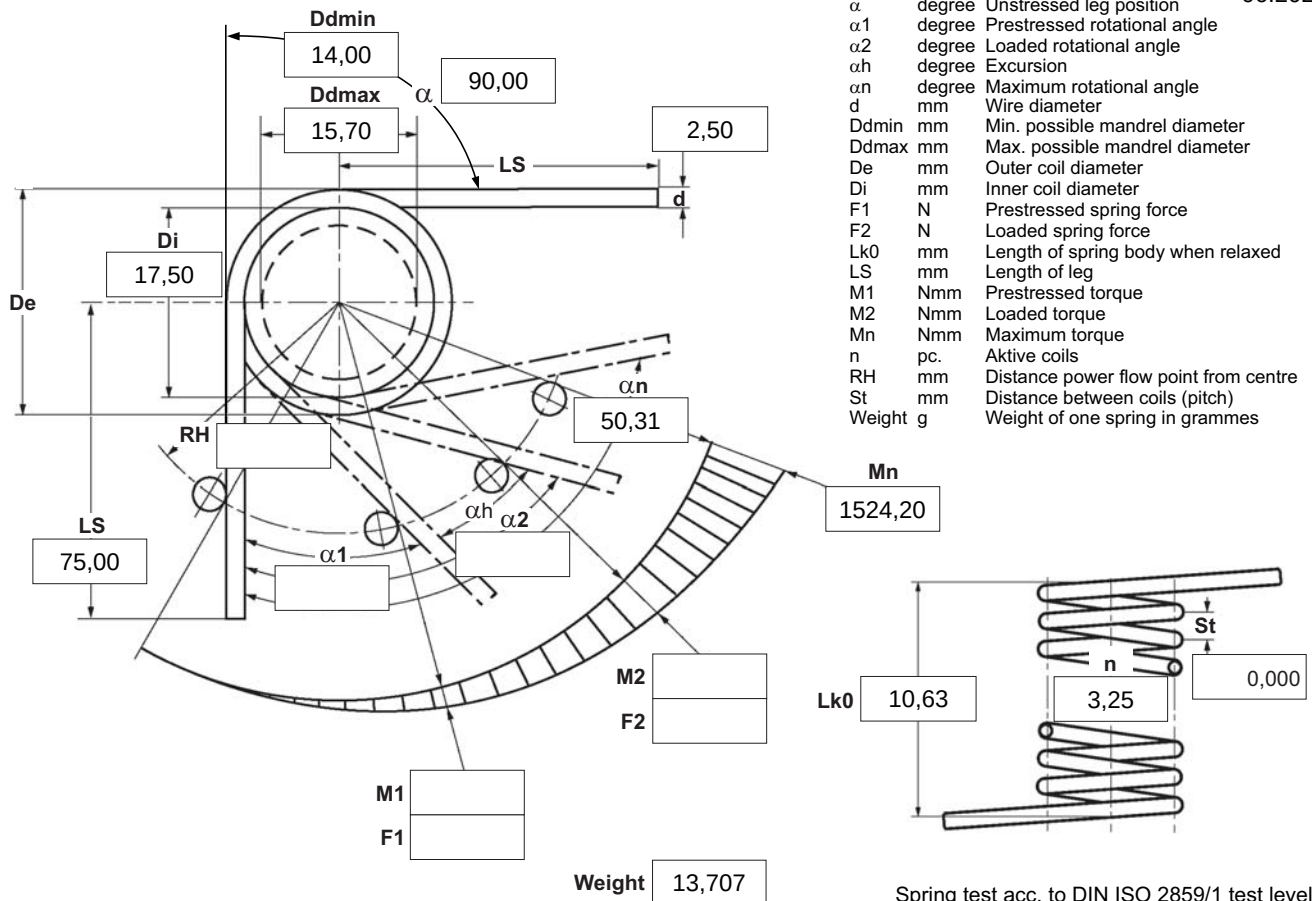

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☒ left ☐ right	5 Excursion a_h degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td rowspan="3">☒</td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐	☒	2	☒	☒	☒	☒	☒	3	☐	☐	☐	☐	☐
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																					
1	☐		☐	☐	☐	☐	☒																					
2	☒		☒	☒	☒	☒																						
3	☐	☐	☐	☐	☐																							
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N																											
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. n /																											
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C																											
9 Material 1.4310		13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">A spring torque and the associated swing angle</td> <td style="width: 20%; text-align: center;">α ☒</td> </tr> <tr> <td rowspan="2">A spring torque and the associated swing angle and $\alpha 0$</td> <td style="text-align: center;">n, d ☐</td> </tr> <tr> <td style="text-align: center;">n, Di ☐</td> </tr> <tr> <td rowspan="2">Two spring resistances and the associated swing angle</td> <td style="text-align: center;">α, n, d ☐</td> </tr> <tr> <td style="text-align: center;">α, n, Di ☐</td> </tr> </table>	A spring torque and the associated swing angle	α ☒	A spring torque and the associated swing angle and $\alpha 0$	n, d ☐	n, Di ☐	Two spring resistances and the associated swing angle	α , n, d ☐	α , n, Di ☐																		
A spring torque and the associated swing angle	α ☒																											
A spring torque and the associated swing angle and $\alpha 0$	n, d ☐																											
	n, Di ☐																											
Two spring resistances and the associated swing angle	α , n, d ☐																											
	α , n, Di ☐																											
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut																												
11 Surface treatment 																												
Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 60%;"></th> <th style="width: 20%; text-align: center;">Stupnice množství</th> <th style="width: 20%; text-align: center;">Jedn. cena [EUR]</th> </tr> <tr> <td></td> <td style="text-align: center;">1</td> <td style="text-align: right;">5,4200 €</td> </tr> <tr> <td></td> <td style="text-align: center;">2</td> <td style="text-align: right;">3,8200 €</td> </tr> <tr> <td></td> <td style="text-align: center;">3</td> <td style="text-align: right;">3,6400 €</td> </tr> </table>				Stupnice množství	Jedn. cena [EUR]		1	5,4200 €		2	3,8200 €		3	3,6400 €														
	Stupnice množství	Jedn. cena [EUR]																										
	1	5,4200 €																										
	2	3,8200 €																										
	3	3,6400 €																										

Remarks

Zem pôvodu: DE | číslo celného sadzovníku: 73202089

Prices	
Stupnice množství	Jedn. cena [EUR]
1	5,4200 €
2	3,8200 €
3	3,6400 €
7	2,6600 €
17	1,3800 €
37	1,0200 €
75	0,8900 €
125	0,5823 €
175	0,5445 €
250	0,4945 €
350	0,4610 €
450	0,4169 €