


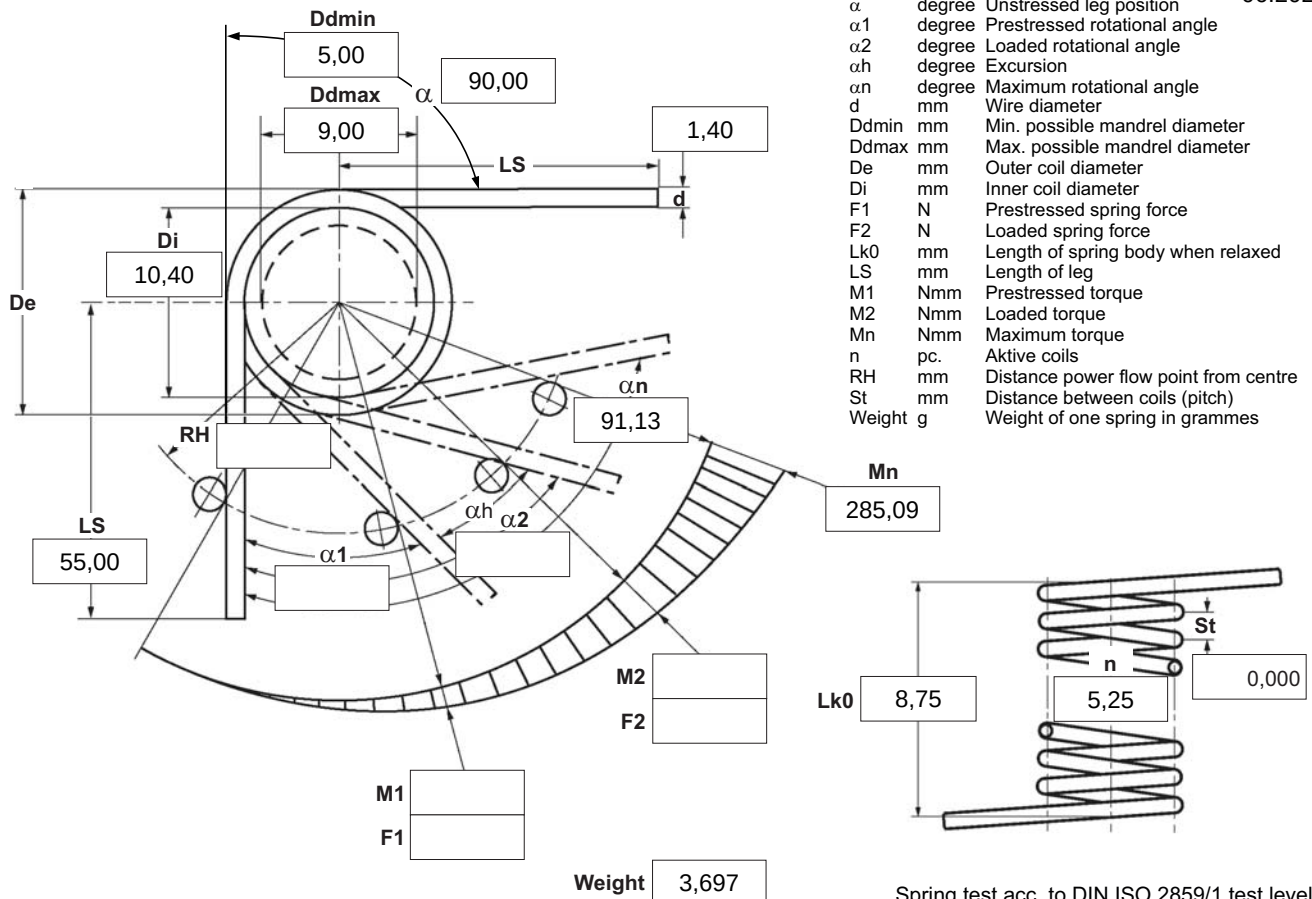

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☐ left ☒ right	5 Excursion <u>α</u> h degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>α,α1,α2</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td></td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td></td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	α,α1,α2	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐		2	☒	☒	☒	☒	☒		3	☐	☐	☐	☐	☐	☒
Grade	Di		Lk0	LSH,LSR	α,α1,α2	M1,M2	Wire diameter d to DIN 2076																							
1	☐		☐	☐	☐	☐																								
2	☒	☒	☒	☒	☒																									
3	☐	☐	☐	☐	☐	☒																								
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N																													
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. n /																													
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C	13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">A spring torque and the associated swing angle</td> <td style="padding: 5px;">α ☒</td> </tr> <tr> <td style="padding: 5px;">A spring torque and the associated swing angle and α0</td> <td style="padding: 5px;">n, d ☐ n, Di ☐</td> </tr> <tr> <td style="padding: 5px;">Two spring resistances and the associated swing angle</td> <td style="padding: 5px;">α, n, d ☐ α, n, Di ☐</td> </tr> </table>	A spring torque and the associated swing angle	α ☒	A spring torque and the associated swing angle and α0	n, d ☐ n, Di ☐	Two spring resistances and the associated swing angle	α, n, d ☐ α, n, Di ☐																						
A spring torque and the associated swing angle	α ☒																													
A spring torque and the associated swing angle and α0	n, d ☐ n, Di ☐																													
Two spring resistances and the associated swing angle	α, n, d ☐ α, n, Di ☐																													
5 Material 	9 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut																													
10 Surface treatment 	11 Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">Cantidad progresiva</th> <th style="text-align: left;">Precio unidad [EUR]</th> </tr> <tr> <td style="text-align: right;">1</td> <td>5,1600 €</td> </tr> <tr> <td style="text-align: right;">2</td> <td>3,6400 €</td> </tr> <tr> <td style="text-align: right;">3</td> <td>3,4700 €</td> </tr> </table>	Cantidad progresiva	Precio unidad [EUR]	1	5,1600 €	2	3,6400 €	3	3,4700 €																					
Cantidad progresiva	Precio unidad [EUR]																													
1	5,1600 €																													
2	3,6400 €																													
3	3,4700 €																													

Remarks

País de origen: DE | Número de arancel aduanero: 73202089