


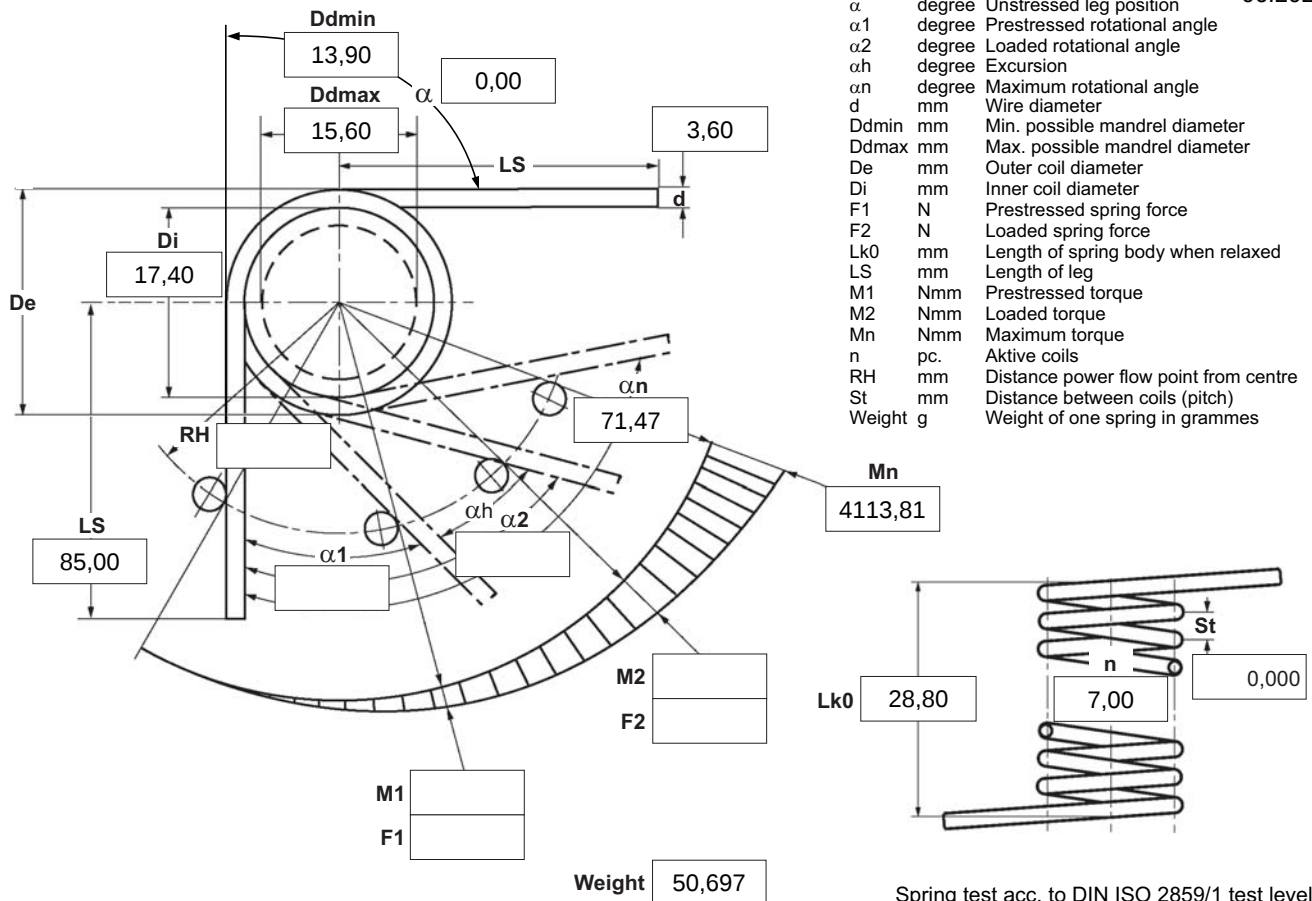

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☐ left ☒ right	5 Excursion <u>a</u> degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td></td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td></td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐		2	☒	☒	☒	☒	☒		3	☐	☐	☐	☐	☐	☒
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																							
1	☐		☐	☐	☐	☐																								
2	☒		☒	☒	☒	☒																								
3	☐	☐	☐	☐	☐	☒																								
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. <u>N</u>																													
3 Fixing Recumbent leg Lever leg	7 Stress cycle frequ. <u>n</u> /																													
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C																													
9 Material 1.4310		13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td>A spring torque and the associated swing angle</td> <td>α</td> <td>☒</td> </tr> <tr> <td rowspan="2">A spring torque and the associated swing angle and $\alpha 0$</td> <td>n, d</td> <td>☐</td> </tr> <tr> <td>n, Di</td> <td>☐</td> </tr> <tr> <td rowspan="2">Two spring resistances and the associated swing angle</td> <td>α, n, d</td> <td>☐</td> </tr> <tr> <td>α, n, Di</td> <td>☐</td> </tr> </table>	A spring torque and the associated swing angle	α	☒	A spring torque and the associated swing angle and $\alpha 0$	n, d	☐	n, Di	☐	Two spring resistances and the associated swing angle	α , n, d	☐	α , n, Di	☐															
A spring torque and the associated swing angle	α		☒																											
A spring torque and the associated swing angle and $\alpha 0$	n, d		☐																											
	n, Di	☐																												
Two spring resistances and the associated swing angle	α , n, d	☐																												
	α , n, Di	☐																												
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut																														
11 Surface treatment 																														
Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 40%;"></th> <th style="width: 30%; text-align: right;">Cantidad progresiva</th> <th style="width: 30%; text-align: right;">Precio unidad [EUR]</th> </tr> <tr> <td></td> <td style="text-align: right;">1</td> <td style="text-align: right;">5,5300 €</td> </tr> <tr> <td></td> <td style="text-align: right;">2</td> <td style="text-align: right;">3,9000 €</td> </tr> <tr> <td></td> <td style="text-align: right;">3</td> <td style="text-align: right;">3,7100 €</td> </tr> </table>				Cantidad progresiva	Precio unidad [EUR]		1	5,5300 €		2	3,9000 €		3	3,7100 €																
	Cantidad progresiva	Precio unidad [EUR]																												
	1	5,5300 €																												
	2	3,9000 €																												
	3	3,7100 €																												

Remarks

País de origen: DE | Número de arancel aduanero: 73202089