


05.2025

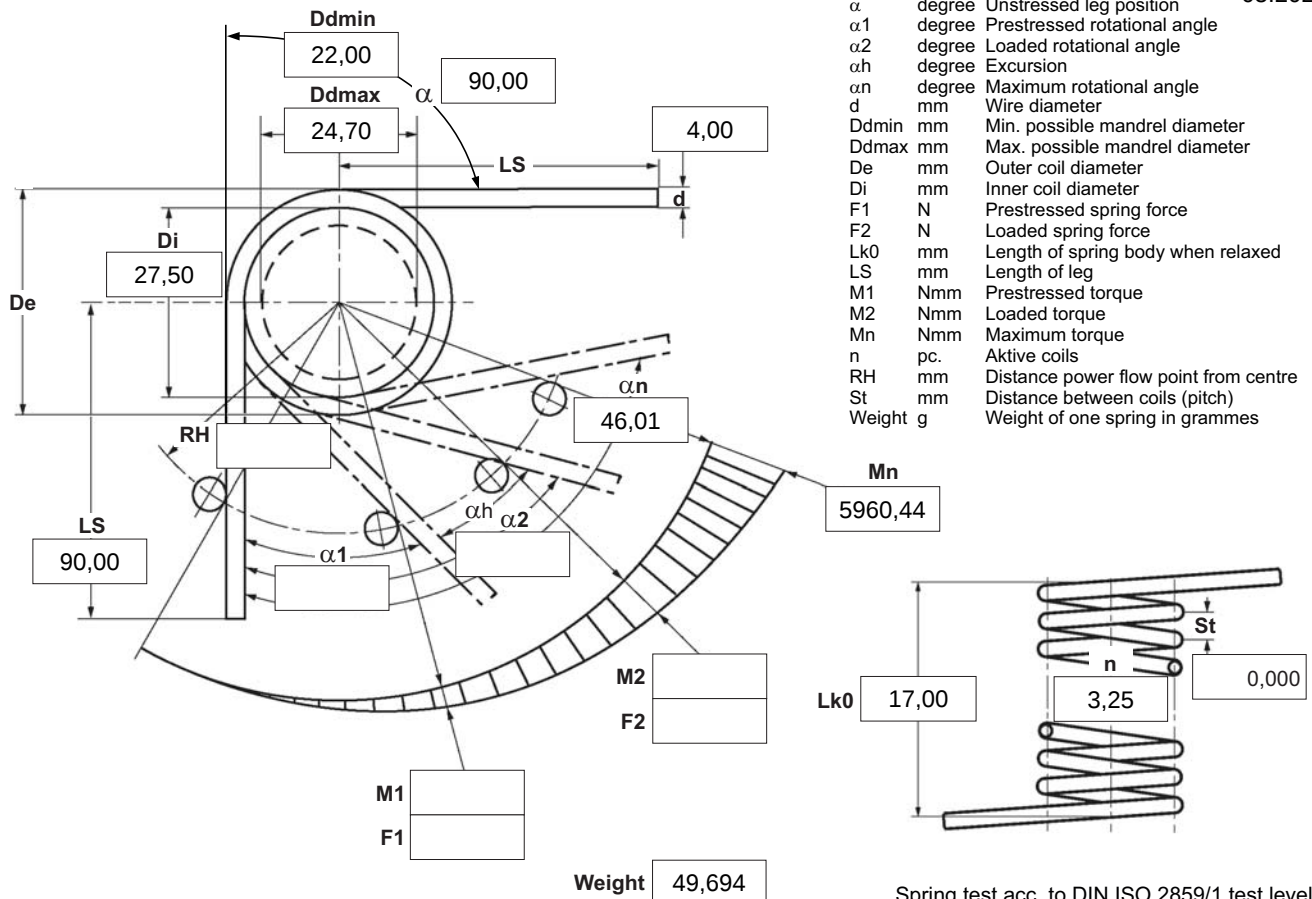

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☒ left ☐ right	5 Excursion a_h degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td rowspan="3">☒</td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> </tbody> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐	☒	2	☒	☒	☒	☒	☒	3	☐	☐	☐	☐	☐
Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																						
1	☐	☐	☐	☐	☐	☒																						
2	☒	☒	☒	☒	☒																							
3	☐	☐	☐	☐	☐																							
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N	13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">A spring torque and the associated swing angle</td> <td style="width: 50px; text-align: center;">α</td> <td style="width: 50px; text-align: center;">☒</td> </tr> <tr> <td style="padding: 5px;">A spring torque and the associated swing angle and $\alpha 0$</td> <td style="text-align: center;">n, d</td> <td style="text-align: center;">☐</td> </tr> <tr> <td style="padding: 5px;"></td> <td style="text-align: center;">n, Di</td> <td style="text-align: center;">☐</td> </tr> <tr> <td style="padding: 5px;">Two spring resistances and the associated swing angle</td> <td style="text-align: center;">α, n, d</td> <td style="text-align: center;">☐</td> </tr> <tr> <td style="padding: 5px;"></td> <td style="text-align: center;">α, n, Di</td> <td style="text-align: center;">☐</td> </tr> </table>	A spring torque and the associated swing angle	α	☒	A spring torque and the associated swing angle and $\alpha 0$	n, d	☐		n, Di	☐	Two spring resistances and the associated swing angle	α , n, d	☐		α , n, Di	☐											
A spring torque and the associated swing angle	α		☒																									
A spring torque and the associated swing angle and $\alpha 0$	n, d		☐																									
	n, Di	☐																										
Two spring resistances and the associated swing angle	α , n, d	☐																										
	α , n, Di	☐																										
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. n /																											
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C																											
9 Material 1.4310		Prices <table style="width: 100%; margin-top: 10px;"> <thead> <tr> <th style="text-align: left;">Mennyiségi lépcsők</th> <th style="text-align: right;">Egységár (EUR)</th> </tr> </thead> <tbody> <tr> <td style="text-align: right;">1</td> <td style="text-align: right;">6,3100 €</td> </tr> <tr> <td style="text-align: right;">2</td> <td style="text-align: right;">4,4500 €</td> </tr> <tr> <td style="text-align: right;">3</td> <td style="text-align: right;">4,2400 €</td> </tr> </tbody> </table>	Mennyiségi lépcsők	Egységár (EUR)	1	6,3100 €	2	4,4500 €	3	4,2400 €																		
Mennyiségi lépcsők	Egységár (EUR)																											
1	6,3100 €																											
2	4,4500 €																											
3	4,2400 €																											
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut		11 Surface treatment 																										

Remarks

Származási ország: DE | Vámtarifaszám: 73202089

Prices

Mennyiségi lépcsők	Egységár (EUR)
1	6,3100 €
2	4,4500 €
3	4,2400 €
7	3,4500 €
17	2,2200 €
37	1,7500 €
75	1,6000 €