


α	degree	Unstressed leg position
α_1	degree	Prestressed rotational angle
α_2	degree	Loaded rotational angle
αh	degree	Excursion
αn	degree	Maximum rotational angle
d	mm	Wire diameter
Ddmin	mm	Min. possible mandrel diameter
Ddmax	mm	Max. possible mandrel diameter
De	mm	Outer coil diameter
Di	mm	Inner coil diameter
F1	N	Prestressed spring force
F2	N	Loaded spring force
Lk0	mm	Length of spring body when relaxed
LS	mm	Length of leg
M1	Nmm	Prestressed torque
M2	Nmm	Loaded torque
Mn	Nmm	Maximum torque
n	pc.	Active coils
RH	mm	Distance power flow point from centre
St	mm	Distance between coils (pitch)
Weight	g	Weight of one spring in grammes

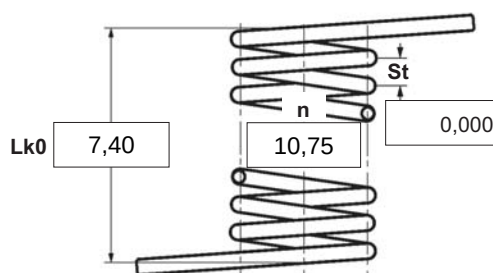

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☐ left ☒ right	5 Excursion α_h deg.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha_1, \alpha_2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td rowspan="3" style="text-align: center; vertical-align: middle;"> Wire diameter d to DIN 2076 ☒ </td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> </tbody> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha_1, \alpha_2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐	Wire diameter d to DIN 2076 ☒	2	☒	☒	☒	☒	☒	3	☐	☐	☐	☐	☐
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha_1, \alpha_2$	M1,M2	Wire diameter d to DIN 2076																					
1	☐		☐	☐	☐	☐	Wire diameter d to DIN 2076 ☒																					
2	☒	☒	☒	☒	☒																							
3	☐	☐	☐	☐	☐																							
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N																											
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. n /																											
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C																											
9 Material 1.4310		13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>A spring torque and the associated swing angle</td> <td>α</td> <td>☒</td> </tr> <tr> <td>A spring torque and the associated swing angle and α_0</td> <td>n, d</td> <td>☐</td> </tr> <tr> <td></td> <td>n, Di</td> <td>☐</td> </tr> <tr> <td>Two spring resistances and the associated swing angle</td> <td>α, n, d</td> <td>☐</td> </tr> <tr> <td></td> <td>α, n, Di</td> <td>☐</td> </tr> </table>	A spring torque and the associated swing angle	α	☒	A spring torque and the associated swing angle and α_0	n, d	☐		n, Di	☐	Two spring resistances and the associated swing angle	α , n, d	☐		α , n, Di	☐											
A spring torque and the associated swing angle	α		☒																									
A spring torque and the associated swing angle and α_0	n, d	☐																										
	n, Di	☐																										
Two spring resistances and the associated swing angle	α , n, d	☐																										
	α , n, Di	☐																										
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut																												
11 Surface treatment 																												
Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 30%;"></th> <th style="width: 35%; text-align: right;">Grupa ilociowa</th> <th style="width: 35%; text-align: right;">Cena jednostkowa</th> </tr> <tr> <td></td> <td style="text-align: right;">1</td> <td style="text-align: right;">[EUR]</td> </tr> <tr> <td></td> <td style="text-align: right;">2</td> <td style="text-align: right;">5,1100 €</td> </tr> <tr> <td></td> <td style="text-align: right;">3</td> <td style="text-align: right;">3,6000 €</td> </tr> </table>				Grupa ilociowa	Cena jednostkowa		1	[EUR]		2	5,1100 €		3	3,6000 €														
	Grupa ilociowa	Cena jednostkowa																										
	1	[EUR]																										
	2	5,1100 €																										
	3	3,6000 €																										

Remarks

Kraj pochodzenia: DE | Numer taryfy celnej: 73202089

13	Production compensation	through
A spring torque and the associated swing angle	α	☒
A spring torque and the associated swing angle and α_0	n, d	☐
	n, Di	☐
Two spring resistances and the associated swing angle	α, n, d	☐
	α, n, Di	☐

Prices

Grupa ilociowa	Cena jednostkowa [EUR]
1	
2	5,1100 €
3	3,6000 €
7	3,4300 €
17	2,2200 €
37	1,1200 €
75	0,7400 €
125	0,5500 €
175	0,4570 €
250	0,4069 €
350	0,3567 €
450	0,3095 €
	0,2652 €