


05.2025

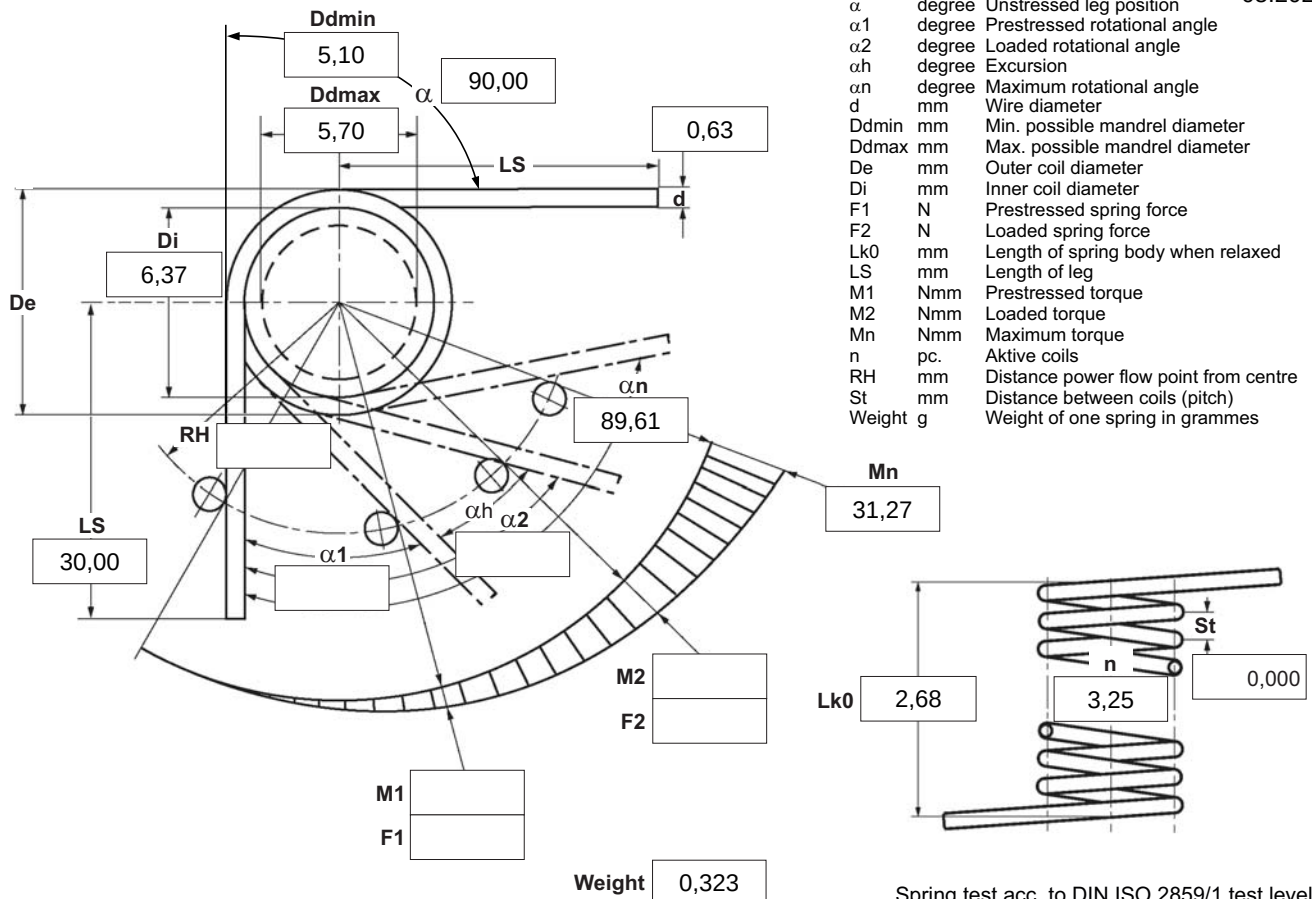

Spring test acc. to DIN ISO 2859/1 test level II

1 Winding direction ☒ left ☐ right	5 Excursion αh degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td></td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td></td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐		2	☒	☒	☒	☒	☒		3	☐	☐	☐	☐	☐	☒
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																							
1	☐		☐	☐	☐	☐																								
2	☒		☒	☒	☒	☒																								
3	☐	☐	☐	☐	☐	☒																								
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N																													
3 Fixing Recumbent leg ☐ Lever leg ☐	7 Stress cycle frequ. n /																													
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C 9 Material 1.4310																													
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut		13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">A spring torque and the associated swing angle</td> <td style="width: 20%;">α ☒</td> </tr> <tr> <td rowspan="2">A spring torque and the associated swing angle and α0</td> <td>n, d ☐</td> </tr> <tr> <td>n, Di ☐</td> </tr> <tr> <td rowspan="2">Two spring resistances and the associated swing angle</td> <td>α, n, d ☐</td> </tr> <tr> <td>α, n, Di ☐</td> </tr> </table>	A spring torque and the associated swing angle	α ☒	A spring torque and the associated swing angle and α0	n, d ☐	n, Di ☐	Two spring resistances and the associated swing angle	α, n, d ☐	α, n, Di ☐																				
A spring torque and the associated swing angle	α ☒																													
A spring torque and the associated swing angle and α0	n, d ☐																													
	n, Di ☐																													
Two spring resistances and the associated swing angle	α, n, d ☐																													
	α, n, Di ☐																													
11 Surface treatment 		Prices <table style="width: 100%;"> <tr> <td style="width: 40%;">Grupa ilociowa</td> <td style="width: 20%;">Cena jednostkowa</td> <td style="width: 40%;"></td> </tr> <tr> <td>1</td> <td>[EUR]</td> <td></td> </tr> <tr> <td>2</td> <td></td> <td>5,1100 €</td> </tr> <tr> <td>3</td> <td></td> <td>3,6000 €</td> </tr> </table>	Grupa ilociowa	Cena jednostkowa		1	[EUR]		2		5,1100 €	3		3,6000 €																
Grupa ilociowa	Cena jednostkowa																													
1	[EUR]																													
2		5,1100 €																												
3		3,6000 €																												

Remarks

Kraj pochodzenia: DE | Numer taryfy celnej: 73202089

Prices

Grupa ilociowa	Cena jednostkowa
1	[EUR]
2	5,1100 €
3	3,6000 €
7	3,4300 €
17	2,2200 €
37	1,1200 €
75	0,7400 €
125	0,5500 €
175	0,4570 €
250	0,4069 €
350	0,3567 €
450	0,3095 €
	0,2652 €