


08.2025

d	mm	Wire diameter
D	mm	Mean coil diameter
De	mm	Diameter of mandrel
Dd	mm	Outer coil diameter
Dh	mm	Diameter of bush
e1	mm	Perm.dev. perpendicular line
e2	mm	Perm.dev. parallel line
F1	N	Prestressed spring force
F2	N	Loaded spring force

F _n	N	Maximum force in static use
F _c	N	Theoretic maximum force at L _c
L ₀	mm	Length of unstressed spring
L ₁	mm	Prestressed spring length
L ₂	mm	Loaded spring length
L _k	mm	Buckling length
L _n	mm	Minimum length in static use
L _c	mm	Block length
n	pc.	Active coils

nt	pc.	Total coils	08.
R	N/mm	Spring rate	
S	mm	Pitch (distance between coils)	
s1	mm	Prestressed spring deflection	
s2	mm	Loaded spring deflection	
sh	mm	Maximum stroke in static use	
sn	mm	Maximum spring deflection in static use	
Weight	g	Weight of one spring in grammes	
Fndyn	N	Maximum force in dynamic force	
Fndtol	N	(+/-) tolerance of maximum dynamic force	
Lndyn	mm	Minimum length in dynamic use	
shdyn	mm	Maximum stroke in dynamic use	

* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

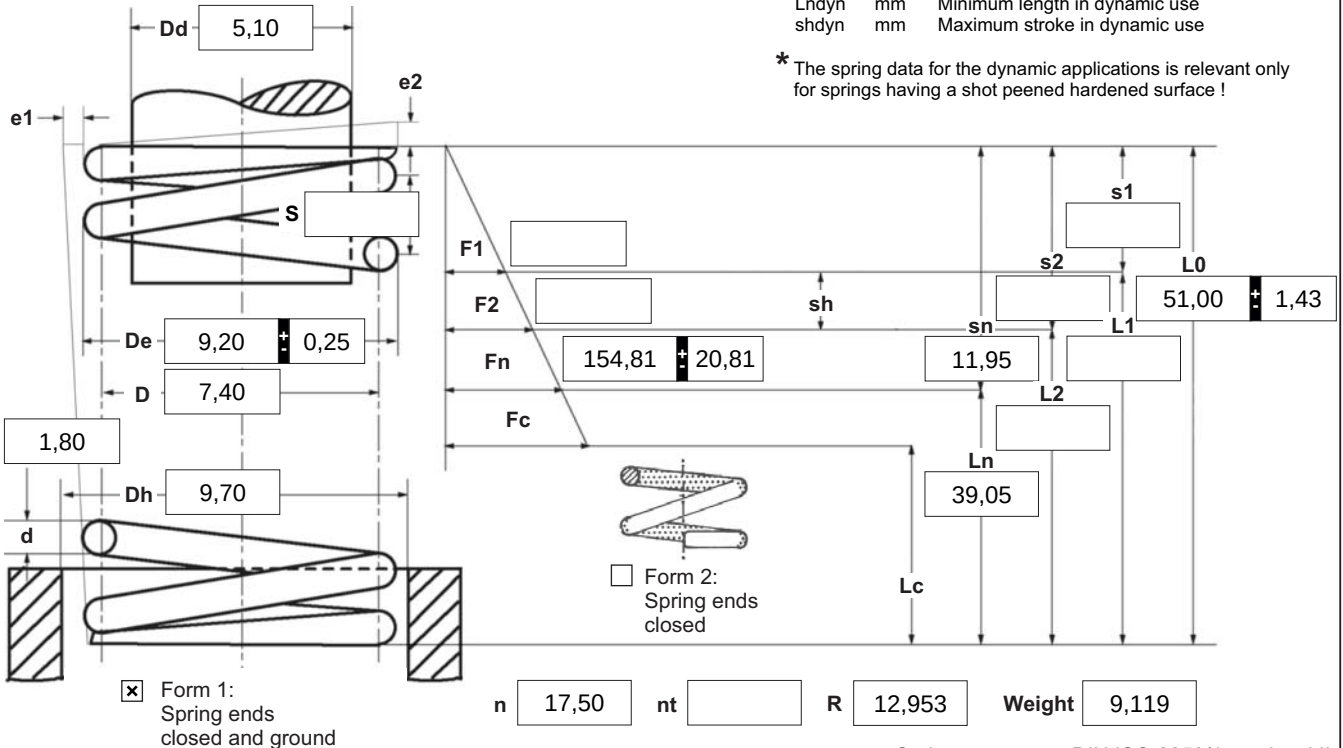

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction * ☐ left ☒ right	7 Guidance and seat to DIN EN 13906-1 ☐ mandrel ☐ bush Buckling length L_k at v=0,5 / Bild 5 36,30 mm	12 Tolerances to DIN EN 15800 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>De,Di,D</th> <th>L0</th> <th>F1,F2</th> <th>e1,e2</th> <th rowspan="4" style="font-size: 0.8em; text-align: left;">Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> <tr> <td colspan="5"></td> <td>☒</td> </tr> </table>	Grade	De,Di,D	L0	F1,F2	e1,e2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	2	☒	☒	☒	☒	3	☐	☐	☐	☐						☒	
Grade	De,Di,D	L0	F1,F2	e1,e2	Wire diameter d to DIN 2076																									
1	☐	☐	☐	☐																										
2	☒	☒	☒	☒																										
3	☐	☐	☐	☐																										
					☒																									
2 Dynamic load * <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Fndyn</td> <td style="border: 1px solid black; text-align: center;">129,14</td> </tr> <tr> <td>Fndtol</td> <td style="border: 1px solid black; text-align: center;">20,43</td> </tr> <tr> <td>Lndyn</td> <td style="border: 1px solid black; text-align: center;">41,03</td> </tr> <tr> <td>shdyn</td> <td style="border: 1px solid black; text-align: center;">6,48</td> </tr> </table>	Fndyn	129,14	Fndtol	20,43	Lndyn	41,03	shdyn	6,48																						
Fndyn	129,14																													
Fndtol	20,43																													
Lndyn	41,03																													
shdyn	6,48																													
3 Excursion sh mm	8 Material 1.4310	13 Prouction compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">A spring resistance and associated length of tensed spring</td> <td style="width: 20%;">L0 ☐</td> </tr> <tr> <td>A spring resistance, associated length of tensed spring and L0</td> <td> n, d ☒ n, De, Di ☐ </td> </tr> <tr> <td>Two spring resistances and associated lengths of tensed spring</td> <td> L0, n, d ☐ L0,n,De,Di ☐ </td> </tr> </table>	A spring resistance and associated length of tensed spring	L0 ☐	A spring resistance, associated length of tensed spring and L0	n, d ☒ n, De, Di ☐	Two spring resistances and associated lengths of tensed spring	L0, n, d ☐ L0,n,De,Di ☐																						
A spring resistance and associated length of tensed spring	L0 ☐																													
A spring resistance, associated length of tensed spring and L0	n, d ☒ n, De, Di ☐																													
Two spring resistances and associated lengths of tensed spring	L0, n, d ☐ L0,n,De,Di ☐																													
4 Stress cyc. end. N	9 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut	14 Setting springs All springs which show setting tendency because of their size are pre-set within the production process.																												
5 Stress cycle frequ. n /	10 Springs deburred ☐ inside ☐ outside	Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: left;">Desconto por quantidade</th> <th style="text-align: left;">Preço individual</th> </tr> <tr> <td>1</td> <td>[EUR]</td> </tr> <tr> <td>2</td> <td>5,2700 €</td> </tr> <tr> <td>3</td> <td>3,7200 €</td> </tr> <tr> <td>7</td> <td>3,5400 €</td> </tr> <tr> <td>17</td> <td>2,5100 €</td> </tr> <tr> <td>37</td> <td>1,2200 €</td> </tr> <tr> <td>75</td> <td>0,9000 €</td> </tr> <tr> <td>125</td> <td>0,7300 €</td> </tr> <tr> <td>175</td> <td>0,5070 €</td> </tr> <tr> <td>250</td> <td>0,4444 €</td> </tr> <tr> <td>350</td> <td>0,4132 €</td> </tr> <tr> <td>450</td> <td>0,3853 €</td> </tr> <tr> <td></td> <td>0,3536 €</td> </tr> </table>	Desconto por quantidade	Preço individual	1	[EUR]	2	5,2700 €	3	3,7200 €	7	3,5400 €	17	2,5100 €	37	1,2200 €	75	0,9000 €	125	0,7300 €	175	0,5070 €	250	0,4444 €	350	0,4132 €	450	0,3853 €		0,3536 €
Desconto por quantidade	Preço individual																													
1	[EUR]																													
2	5,2700 €																													
3	3,7200 €																													
7	3,5400 €																													
17	2,5100 €																													
37	1,2200 €																													
75	0,9000 €																													
125	0,7300 €																													
175	0,5070 €																													
250	0,4444 €																													
350	0,4132 €																													
450	0,3853 €																													
	0,3536 €																													
6 Application temp. °C	11 Surface treatment ☐ shot peened 																													
Remarks País de origem: DE Número de tarifa alfandegária: 73202081																														