


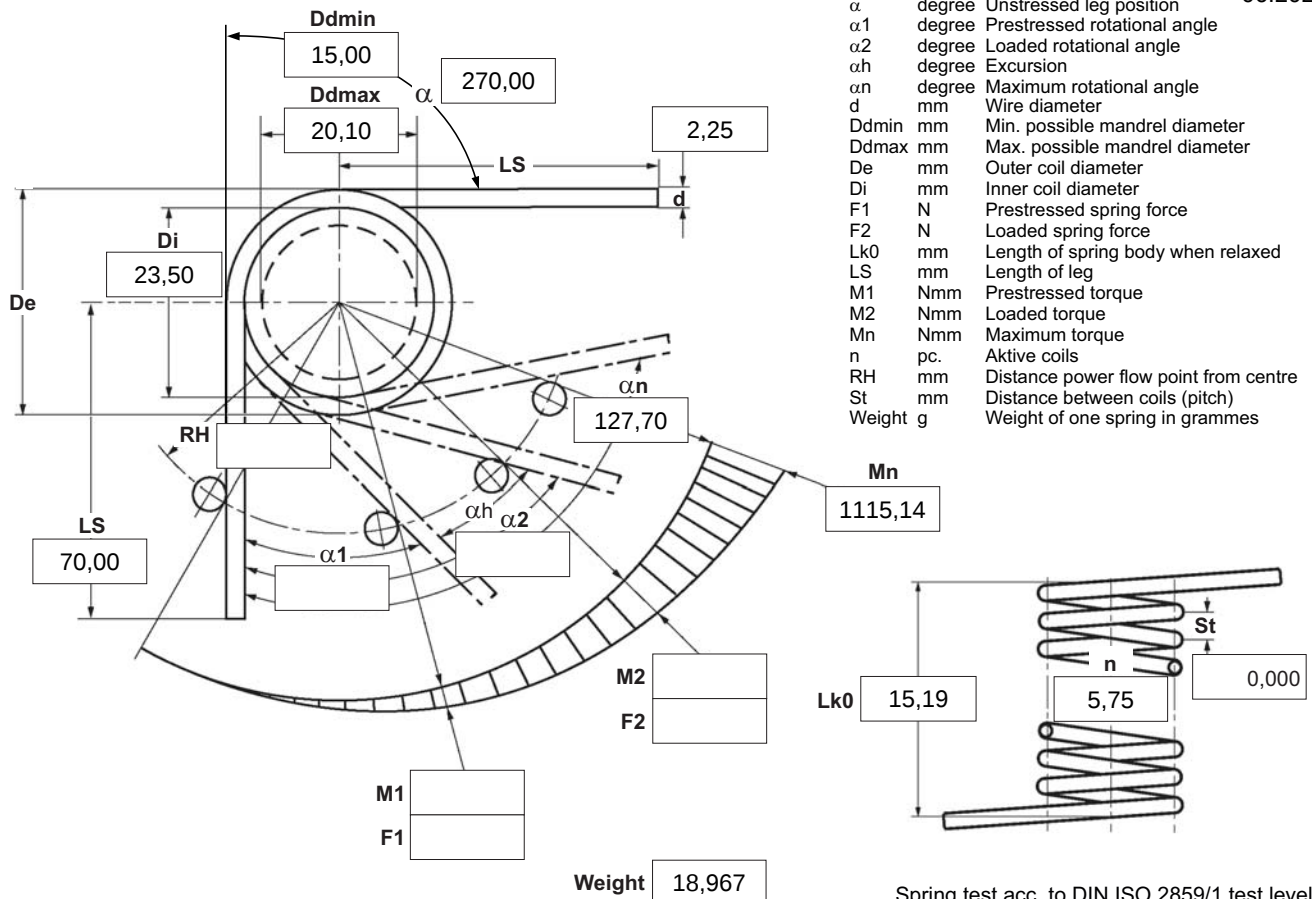

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☐ left ☒ right	5 Excursion <u>a</u> degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td rowspan="3">☒</td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐	☒	2	☒	☒	☒	☒	☒	3	☐	☐	☐	☐	☐
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																					
1	☐		☐	☐	☐	☐	☒																					
2	☒		☒	☒	☒	☒																						
3	☐	☐	☐	☐	☐																							
2 Form of legs tangential, straight, no bends *	6 Stress cyc. end. <u>N</u>																											
*We can also supply torsion springs with any form of leg for an extra charge.	7 Stress cycle frequ. <u>n</u> /																											
3 Fixing Recumbent leg ☐ Lever leg ☐ 	8 Application temp. °C																											
4 Load ☐ in winding direction ☐ against winding direction	9 Material 																											
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut		13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">A spring torque and the associated swing angle</td> <td style="width: 20%;"> α ☒ </td> </tr> <tr> <td rowspan="2">A spring torque and the associated swing angle and $\alpha 0$</td> <td>n, d ☐</td> </tr> <tr> <td>n, Di ☐</td> </tr> <tr> <td rowspan="2">Two spring resistances and the associated swing angle</td> <td>α, n, d ☐</td> </tr> <tr> <td>α, n, Di ☐</td> </tr> </table>	A spring torque and the associated swing angle	α ☒	A spring torque and the associated swing angle and $\alpha 0$	n, d ☐	n, Di ☐	Two spring resistances and the associated swing angle	α , n, d ☐	α , n, Di ☐																		
A spring torque and the associated swing angle	α ☒																											
A spring torque and the associated swing angle and $\alpha 0$	n, d ☐																											
	n, Di ☐																											
Two spring resistances and the associated swing angle	α , n, d ☐																											
	α , n, Di ☐																											
11 Surface treatment 		Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">Desconto por quantidade</td> <td style="width: 40%;">Preço individual</td> </tr> <tr> <td style="text-align: right;">1</td> <td>[EUR]</td> </tr> <tr> <td style="text-align: right;">2</td> <td>5,4200 €</td> </tr> <tr> <td style="text-align: right;">3</td> <td>3,8200 €</td> </tr> </table>	Desconto por quantidade	Preço individual	1	[EUR]	2	5,4200 €	3	3,8200 €																		
Desconto por quantidade	Preço individual																											
1	[EUR]																											
2	5,4200 €																											
3	3,8200 €																											

Remarks

País de origem: DE | Número de tarifa alfandegária: 73202089

Prices

Desconto por quantidade	Preço individual [EUR]
1	5,4200 €
2	3,8200 €
3	3,6400 €
7	2,6600 €
17	1,3800 €
37	1,0200 €
75	0,8900 €
125	0,5823 €
175	0,5445 €
250	0,4945 €
350	0,4610 €
450	0,4169 €