


05.2025

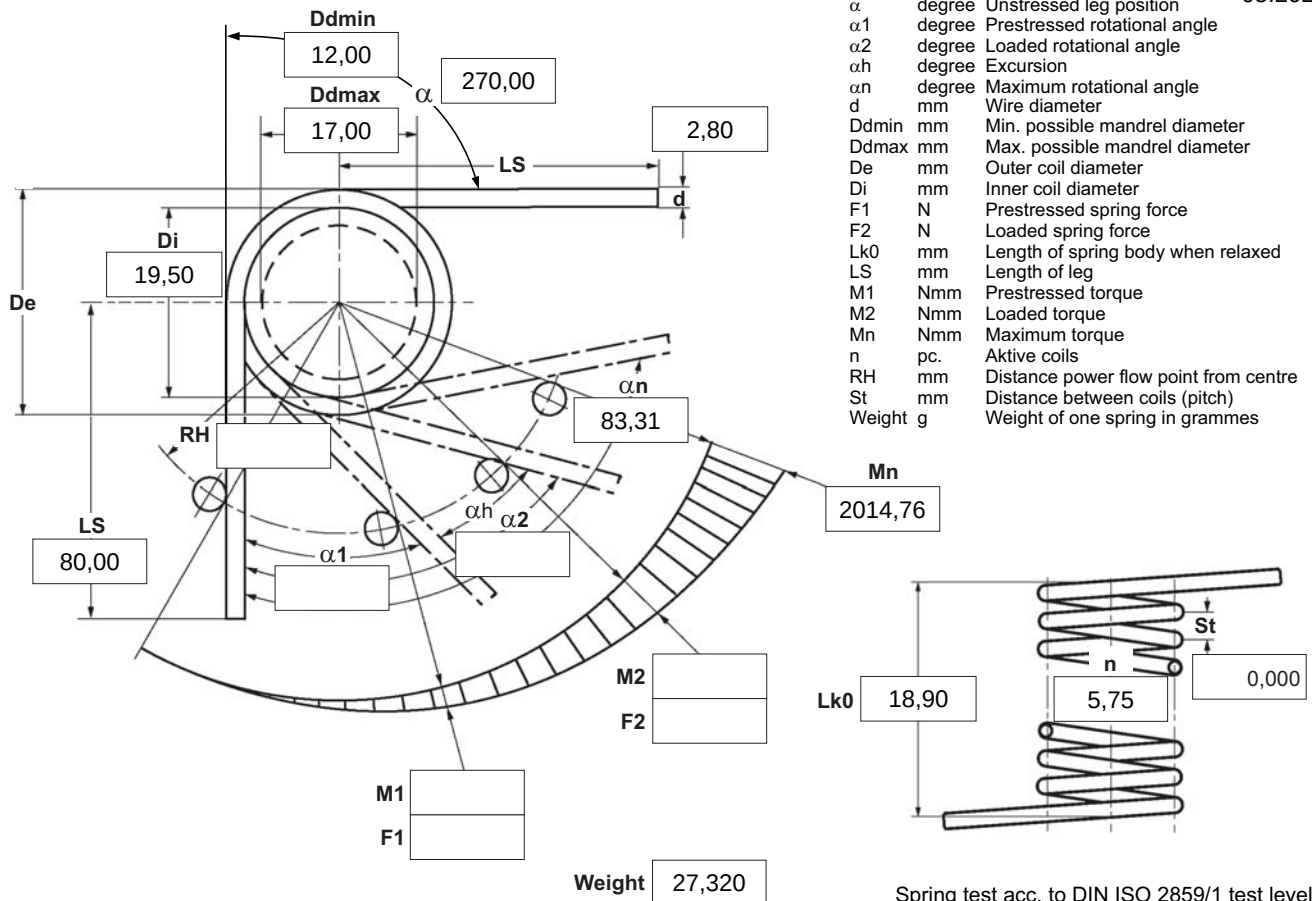

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction
☒  left
 ☐  right
2 Form of legs

tangential, straight, no bends *



*We can also supply torsion springs with any form of leg for an extra charge.

3 Fixing
☐ Recumbent leg
 ☐ Lever leg
4 Load
☐ in winding direction
☐ against winding direction
5 Excursion αh
 degr.
6 Stress cyc. end. N

7 Stress cycle frequ. n
 /
8 Application temp.
 °C
9 Material

1.4310

10 Wire or rod surface
☒ drawn
 ☐ rolled
 ☐ metal-cut
11 Surface treatment

12 Tolerances to DIN 2194

Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076
1	☐	☐	☐	☐	☐	☐
2	☒	☒	☒	☒	☒	☒
3	☐	☐	☐	☐	☐	☒

13 Production compensation

through

A spring torque and the associated swing angle	α	☒
A spring torque and the associated swing angle and $\alpha 0$	n, d	☐
	n, Di	☐
Two spring resistances and the associated swing angle	α, n, d	☐
	α, n, Di	☐

Prices

Desconto por quantidade	Preço individual [EUR]
1	5,5300 €
2	3,9000 €
3	3,7100 €
7	2,9000 €
17	1,4300 €
37	1,1000 €
75	0,9400 €
125	0,6511 €
175	0,6135 €
250	0,5760 €
350	0,5306 €
450	0,4927 €

Remarks

País de origem: DE | Número de tarifa alfandegária: 73202089