


α	degree	Unstressed leg position
α_1	degree	Prestressed rotational angle
α_2	degree	Loaded rotational angle
αh	degree	Excursion
αn	degree	Maximum rotational angle
d	mm	Wire diameter
Ddmin	mm	Min. possible mandrel diameter
Ddmax	mm	Max. possible mandrel diameter
De	mm	Outer coil diameter
Di	mm	Inner coil diameter
F1	N	Prestressed spring force
F2	N	Loaded spring force
Lk0	mm	Length of spring body when relaxed
LS	mm	Length of leg
M1	Nmm	Prestressed torque
M2	Nmm	Loaded torque
Mn	Nmm	Maximum torque
n	pc.	Active coils
RH	mm	Distance power flow point from centre
St	mm	Distance between coils (pitch)
Weight	g	Weight of one spring in grammes

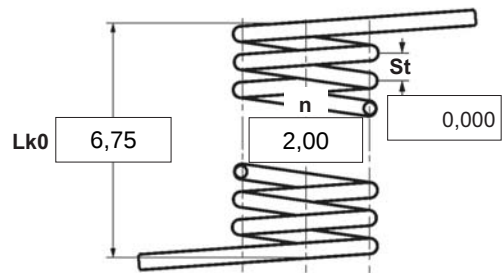

1 Coiling direction ☐ left ☒ right	5 Excursion αh degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td></td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td></td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐		2	☒	☒	☒	☒	☒		3	☐	☐	☐	☐	☐	☒
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																							
1	☐		☐	☐	☐	☐																								
2	☒		☒	☒	☒	☒																								
3	☐	☐	☐	☐	☐	☒																								
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N																													
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. n /																													
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C																													
9 Material 1.4310		13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">A spring torque and the associated swing angle</td> <td style="width: 20%;"> α ☒ </td> </tr> <tr> <td>A spring torque and the associated swing angle and $\alpha 0$</td> <td> n, d ☐ n, Di ☐ </td> </tr> <tr> <td>Two spring resistances and the associated swing angle</td> <td> α, n, d ☐ α, n, Di ☐ </td> </tr> </table>	A spring torque and the associated swing angle	α ☒	A spring torque and the associated swing angle and $\alpha 0$	n, d ☐ n, Di ☐	Two spring resistances and the associated swing angle	α , n, d ☐ α , n, Di ☐																						
A spring torque and the associated swing angle	α ☒																													
A spring torque and the associated swing angle and $\alpha 0$	n, d ☐ n, Di ☐																													
Two spring resistances and the associated swing angle	α , n, d ☐ α , n, Di ☐																													
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut																														
11 Surface treatment 																														
Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 40%;">Quantity scale</th> <th style="width: 60%;">Single price [EUR]</th> </tr> <tr> <td>1</td> <td>5,4200 €</td> </tr> <tr> <td>2</td> <td>3,8200 €</td> </tr> <tr> <td>3</td> <td>3,6400 €</td> </tr> </table>			Quantity scale	Single price [EUR]	1	5,4200 €	2	3,8200 €	3	3,6400 €																				
Quantity scale	Single price [EUR]																													
1	5,4200 €																													
2	3,8200 €																													
3	3,6400 €																													

Country of origin: DE | Customs tariff number: 73202089

Quantity scale	Single price [EUR]
1	5,4200 €
2	3,8200 €
3	3,6400 €
7	2,6600 €
17	1,3800 €
37	1,0200 €
75	0,8900 €
125	0,5823 €
175	0,5445 €
250	0,4945 €
350	0,4610 €
450	0,4169 €