



05.2025

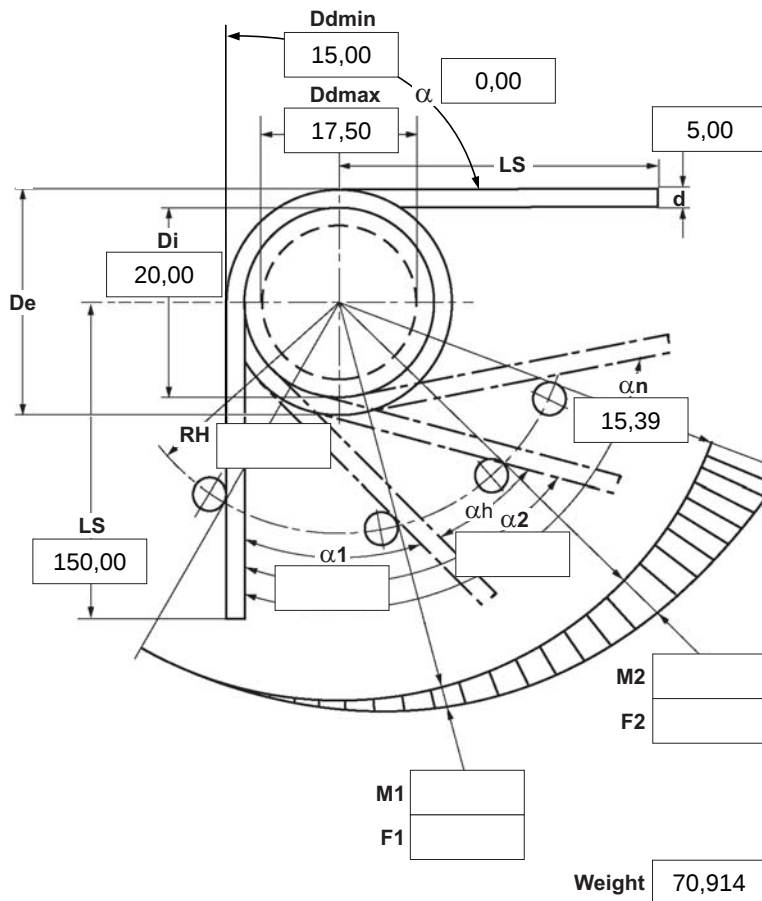

|            |        |                                       |
|------------|--------|---------------------------------------|
| $\alpha$   | degree | Unstressed leg position               |
| $\alpha_1$ | degree | Prestressed rotational angle          |
| $\alpha_2$ | degree | Loaded rotational angle               |
| $\alpha_h$ | degree | Excursion                             |
| $\alpha_n$ | degree | Maximum rotational angle              |
| $d$        | mm     | Wire diameter                         |
| $D_{dmin}$ | mm     | Min. possible mandrel diameter        |
| $D_{dmax}$ | mm     | Max. possible mandrel diameter        |
| $D_e$      | mm     | Outer coil diameter                   |
| $D_i$      | mm     | Inner coil diameter                   |
| $F_1$      | N      | Prestressed spring force              |
| $F_2$      | N      | Loaded spring force                   |
| $L_{k0}$   | mm     | Length of spring body when relaxed    |
| $LS$       | mm     | Length of leg                         |
| $M_1$      | Nmm    | Prestressed torque                    |
| $M_2$      | Nmm    | Loaded torque                         |
| $M_n$      | Nmm    | Maximum torque                        |
| $n$        | pc.    | Active coils                          |
| $RH$       | mm     | Distance power flow point from centre |
| $St$       | mm     | Distance between coils (pitch)        |
| Weight     | g      | Weight of one spring in grammes       |

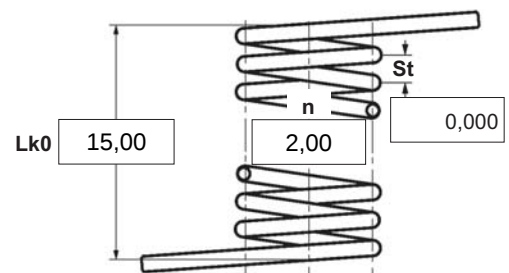

Spring test acc. to DIN ISO 2859/1 test level II

**1 Coiling direction**
☐ left ☒ right
**2 Form of legs**

tangential, straight, no bends \*



\*We can also supply torsion springs with any form of leg for an extra charge.

**3 Fixing**Recumbent leg ☐ Lever leg ☐**4 Load**
☐ in winding direction  
☐ against winding direction
**5 Excursion  $\alpha_h$**   degr.**6 Stress cyc. end.  $N$**  **7 Stress cycle frequ.  $n$**   /**8 Application temp.**  °C**9 Material**

1.4310

**10 Wire or rod surface**
☒ drawn ☐ rolled ☐ metal-cut
**11 Surface treatment**

**12 Tolerances to DIN 2194**

| Grade | Di                                  | Lk0                                 | LSH,LSR                             | $\alpha, \alpha_1, \alpha_2$        | M1,M2                               | Wire diameter d to DIN 2076         |
|-------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 1     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 2     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**13 Production compensation through**

|                                                               |                  |                                     |
|---------------------------------------------------------------|------------------|-------------------------------------|
| A spring torque and the associated swing angle                | $\alpha$         | <input checked="" type="checkbox"/> |
| A spring torque and the associated swing angle and $\alpha_0$ | $n, d$           | <input type="checkbox"/>            |
|                                                               | $n, D_i$         | <input type="checkbox"/>            |
| Two spring resistances and the associated swing angle         | $\alpha, n, d$   | <input type="checkbox"/>            |
|                                                               | $\alpha, n, D_i$ | <input type="checkbox"/>            |

**Prices**

| Quantity scale | Single price [EUR] |
|----------------|--------------------|
| 1              | 6,4400 €           |
| 2              | 4,5400 €           |
| 3              | 4,3300 €           |
| 7              | 3,5700 €           |
| 17             | 2,3000 €           |
| 37             | 1,8300 €           |
| 75             | 1,7400 €           |

**Remarks**

Country of origin: DE | Customs tariff number: 73202089