



05.2025

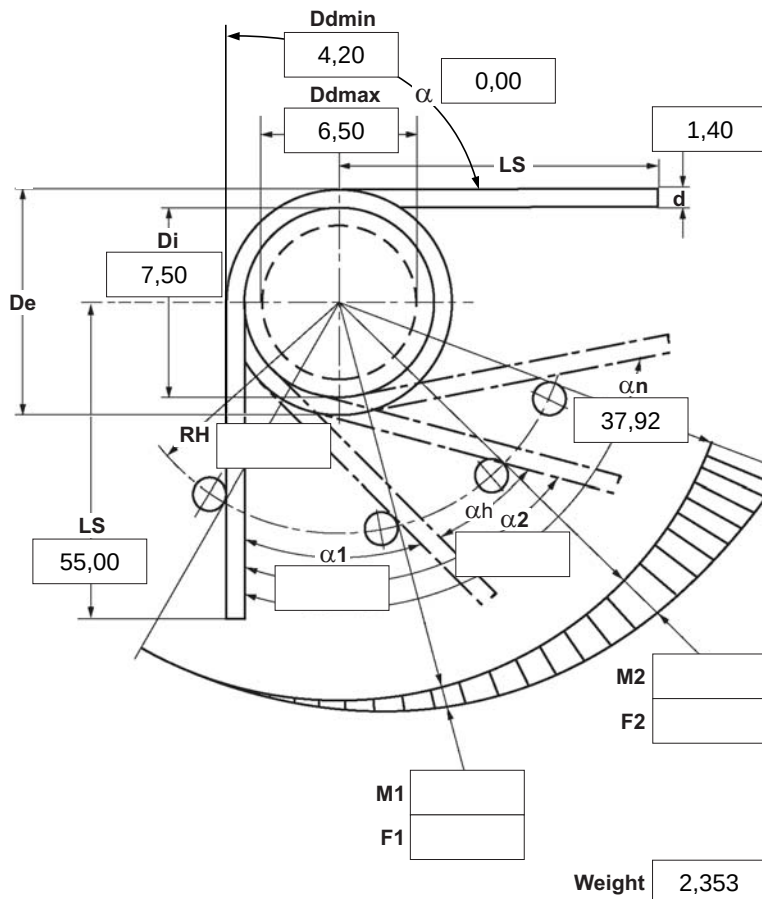

α	degree	Unstressed leg position
α_1	degree	Prestressed rotational angle
α_2	degree	Loaded rotational angle
α_h	degree	Excursion
α_n	degree	Maximum rotational angle
d	mm	Wire diameter
Ddmin	mm	Min. possible mandrel diameter
Ddmax	mm	Max. possible mandrel diameter
De	mm	Outer coil diameter
Di	mm	Inner coil diameter
F1	N	Prestressed spring force
F2	N	Loaded spring force
Lk0	mm	Length of spring body when relaxed
LS	mm	Length of leg
M1	Nmm	Prestressed torque
M2	Nmm	Loaded torque
Mn	Nmm	Maximum torque
n	pc.	Active coils
RH	mm	Distance power flow point from centre
St	mm	Distance between coils (pitch)
Weight	g	Weight of one spring in grammes

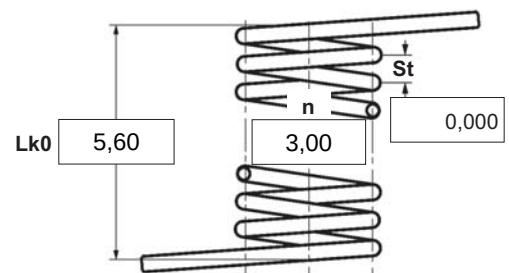

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction**2 Form of legs**tangential, straight,
no bends **We can also supply torsion springs with
any form of leg for an extra charge.**3 Fixing**

Recumbent leg Lever leg

4 Load

- ☐ in winding direction
☐ against winding direction

5 Excursion α_h degr.**6 Stress cyc. end. N** **7 Stress cycle frequ. n** /**8 Application temp.** °C**9 Material**

1.4310

10 Wire or rod surface☒ drawn ☐ rolled ☐ metal-cut**11 Surface treatment****12 Tolerances to DIN 2194**

Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha_1, \alpha_2$	M1,M2	Wire diameter d to DIN 2076
1	☐	☐	☐	☐	☐	☐
2	☒	☒	☒	☒	☒	☒
3	☐	☐	☐	☐	☐	☒

13 Production compensation

through

A spring torque and the associated swing angle	α	☒
A spring torque and the associated swing angle and α_0	n, d	☐
	n, Di	☐
Two spring resistances and the associated swing angle	α, n, d	☐
	α, n, Di	☐

Prices

Cantidad progresiva	Precio unidad [EUR]
1	5,1600 €
2	3,6400 €
3	3,4700 €
7	2,4200 €
17	1,1500 €
37	0,8500 €
75	0,6800 €
125	0,4859 €
175	0,4196 €
250	0,3695 €
350	0,3536 €
450	0,3284 €

Remarks

País de origen: DE | Número de arancel aduanero: 73202089