


d mm Wire diameter  
D mm Mean coil diameter  
Dd mm Diameter of mandrel  
De mm Outer coil diameter  
Dh mm Diameter of bush  
e1 mm Perm.dev. perpendicular line  
e2 mm Perm.dev. parallel line  
F1 N Prestressed spring force  
F2 N Loaded spring force

F<sub>n</sub> N Maximum force in static use  
F<sub>c</sub> N Theoretic maximum force at L<sub>c</sub>  
L0 mm Length of unstressed spring  
L1 mm Prestressed spring length  
L2 mm Loaded spring length  
L<sub>k</sub> mm Buckling length  
L<sub>n</sub> mm Minimum length in static use  
L<sub>c</sub> mm Block length  
n pc. Active coils

nt pc. Total coils  
R N/mm Spring rate  
S mm Pitch (distance between coils)  
s1 mm Prestressed spring deflection  
s2 mm Loaded spring deflection  
sh mm Maximum stroke in static use  
sn mm Maximum spring deflection in static use  
Weight g Weight of one spring in grammes

F<sub>ndyn</sub> N Maximum force in dynamic force  
F<sub>ndtol</sub> N (+/-) tolerance of maximum dynamic force  
L<sub>ndyn</sub> mm Minimum length in dynamic use  
sh<sub>dyn</sub> mm Maximum stroke in dynamic use

\* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

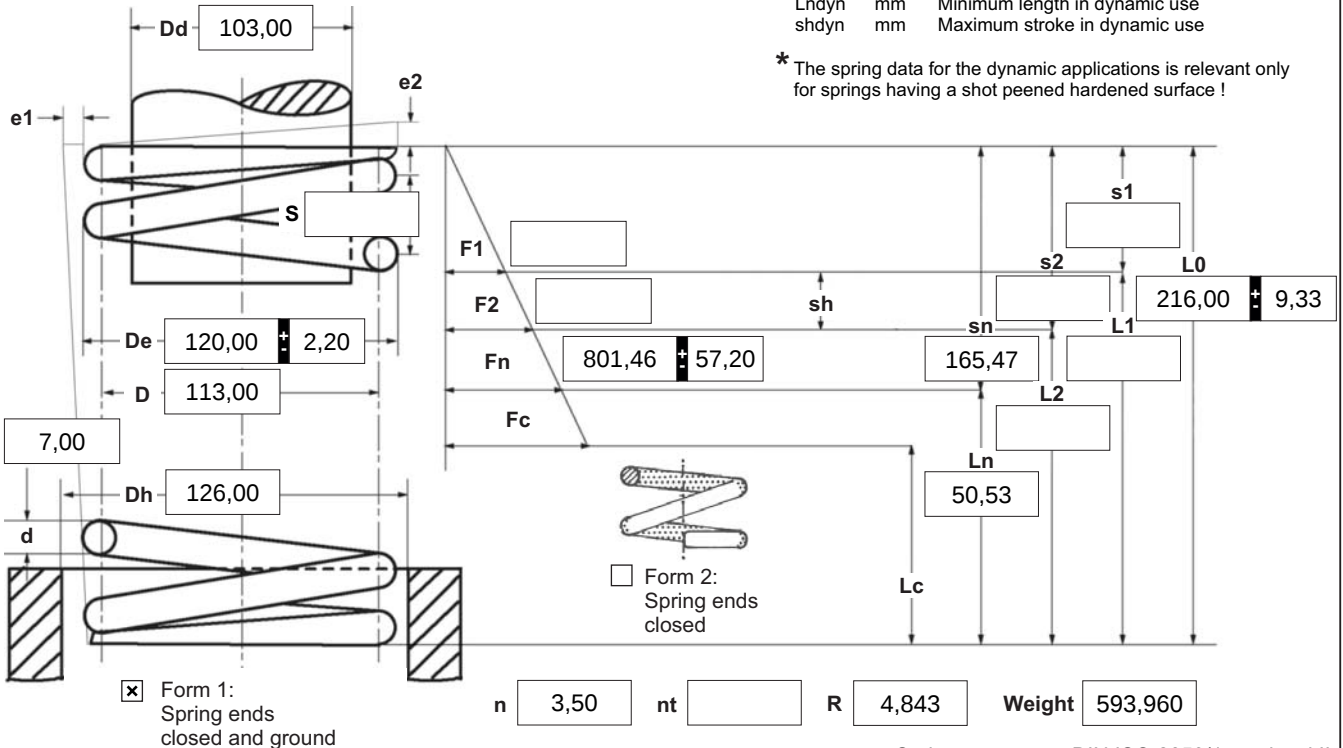

Spring test acc. to DIN ISO 2859/1 test level II

# 1 Coiling direction

☐ left ☒ right

# 2 Dynamic load \*

F<sub>ndyn</sub> 772,29

F<sub>ndtol</sub> 56,70

L<sub>ndyn</sub> 56,55

sh<sub>dyn</sub> 73,16

3 Excursion sh mm

4 Stress cyc. end. N

5 Stress cycle frequ. n /

6 Application temp. °C

# Remarks

Származási ország: DE | Vámtarifaszám: 73202081

# 7 Guidance and seat to DIN EN 13906-1

☐ mandrel ☐ bush

Buckling length L<sub>k</sub> at

v=0,5 / Bild 5 0,00 mm

# 8 Material

EN 10270-1

# 9 Wire or rod surface

☒ drawn ☐ rolled ☐ metal-cut

10 Springs deburred ☐ inside ☐ outside

11 Surface treatment ☐ shot peened

# 12 Tolerances to DIN EN 15800

| Grade | De,Di,D                             | L0                                  | F1,F2                               | e1,e2                               | Wire diameter d to DIN 2076         |
|-------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 1     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 2     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |

# 13 Production compensation through

|                                                                |               |                                     |
|----------------------------------------------------------------|---------------|-------------------------------------|
| A spring resistance and associated length of tensed spring     | L0            | <input type="checkbox"/>            |
| A spring resistance, associated length of tensed spring and L0 | n, d          | <input checked="" type="checkbox"/> |
|                                                                | n, De, Di     | <input type="checkbox"/>            |
| Two spring resistances and associated lengths of tensed spring | L0, n, d      | <input type="checkbox"/>            |
|                                                                | L0, n, De, Di | <input type="checkbox"/>            |

# 14 Setting springs

All springs which show setting tendency because of their size are pre-set within the production process.

# Prices

| Mennyiségi lépcső | Egységár (EUR) |
|-------------------|----------------|
| 1                 | 16,3800 €      |
| 2                 | 13,0500 €      |
| 3                 | 9,0700 €       |
| 7                 | 7,2200 €       |
| 17                | 5,7200 €       |
| 37                | 4,9500 €       |
| 75                | 4,9100 €       |
| 125               | 4,9440 €       |
| 175               | 4,8928 €       |
| 250               | 4,7033 €       |
| 350               | 4,5611 €       |