


d mm Wire diameter  
D mm Mean coil diameter  
Dd mm Diameter of mandrel  
De mm Outer coil diameter  
Dh mm Diameter of bush  
e1 mm Perm.dev. perpendicular line  
e2 mm Perm.dev. parallel line  
F1 N Prestressed spring force  
F2 N Loaded spring force

F<sub>n</sub> N Maximum force in static use  
F<sub>c</sub> N Theoretic maximum force at L<sub>c</sub>  
L0 mm Length of unstressed spring  
L1 mm Prestressed spring length  
L2 mm Loaded spring length  
L<sub>k</sub> mm Buckling length  
L<sub>n</sub> mm Minimum length in static use  
L<sub>c</sub> mm Block length  
n pc. Active coils

nt pc. Total coils  
R N/mm Spring rate  
S mm Pitch (distance between coils)  
s1 mm Prestressed spring deflection  
s2 mm Loaded spring deflection  
sh mm Maximum stroke in static use  
sn mm Maximum spring deflection in static use  
Weight g Weight of one spring in grammes

F<sub>ndyn</sub> N Maximum force in dynamic force  
F<sub>ndtol</sub> N (+/-) tolerance of maximum dynamic force  
L<sub>ndyn</sub> mm Minimum length in dynamic use  
sh<sub>dyn</sub> mm Maximum stroke in dynamic use

\* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

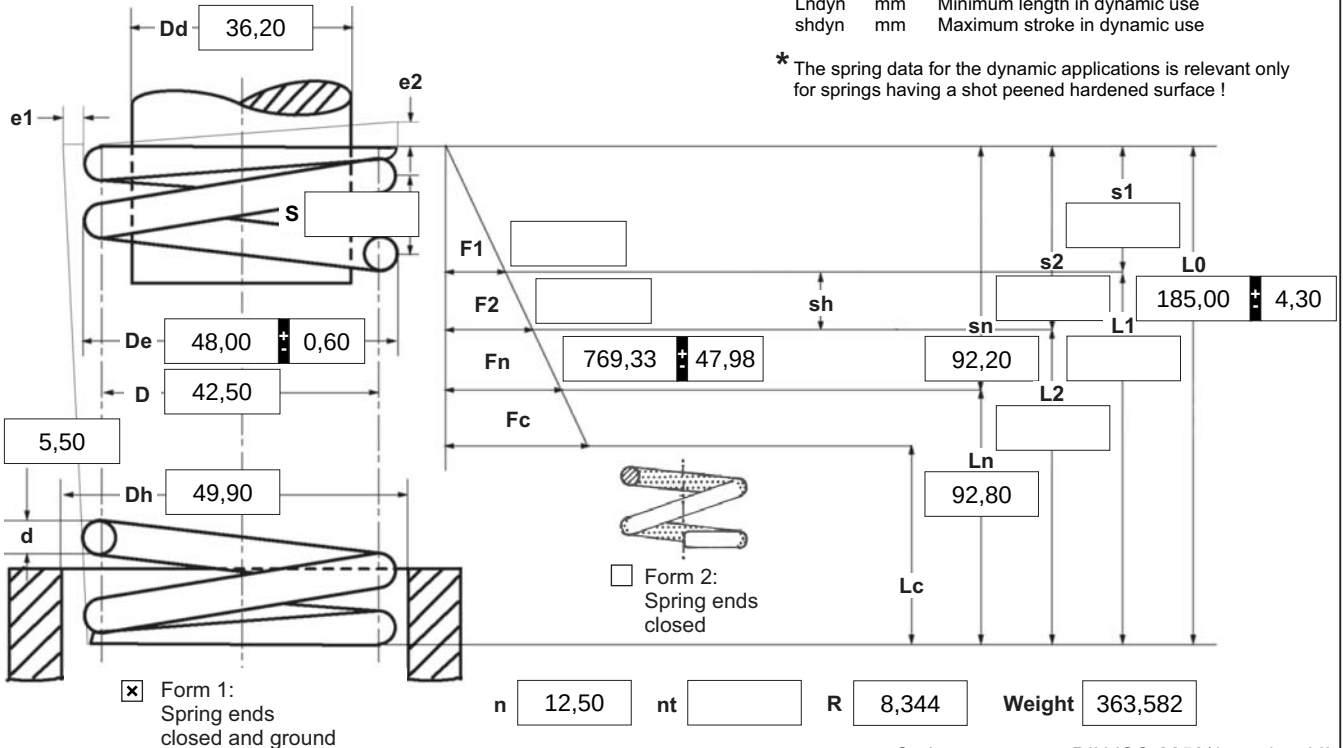

Spring test acc. to DIN ISO 2859/1 test level II

# 1 Coiling direction

☐ left ☒ right

# 2 Dynamic load \*

F<sub>ndyn</sub> 713,84

F<sub>ndtol</sub> 47,20

L<sub>ndyn</sub> 99,45

sh<sub>dyn</sub> 33,80

# 3 Excursion sh

mm

# 4 Stress cyc. end. N

# 5 Stress cycle frequ. n

/

# 6 Application temp.

°C

# Remarks


Származási ország: DE | Vámtarifaszám: 73202081

# 7 Guidance and seat to DIN EN 13906-1

☐ mandrel ☐ bush

Buckling length L<sub>k</sub> at

v=0,5 / Bild 5 0,00 mm



# 8 Material

1.4310

# 9 Wire or rod surface

☒ drawn ☐ rolled ☐ metal-cut

# 10 Springs deburred

☐ inside ☐ outside

# 11 Surface treatment

☐ shot peened

# 12 Tolerances to DIN EN 15800

| Grade | De, Di, D                           | L0                                  | F1, F2                              | e1, e2                              | Wire diameter d to DIN 2076         |
|-------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 1     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 2     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |

# 13 Production compensation through

|                                                                |               |                                     |
|----------------------------------------------------------------|---------------|-------------------------------------|
| A spring resistance and associated length of tensed spring     | L0            | <input type="checkbox"/>            |
| A spring resistance, associated length of tensed spring and L0 | n, d          | <input checked="" type="checkbox"/> |
|                                                                | n, De, Di     | <input type="checkbox"/>            |
| Two spring resistances and associated lengths of tensed spring | L0, n, d      | <input type="checkbox"/>            |
|                                                                | L0, n, De, Di | <input type="checkbox"/>            |

# 14 Setting springs

All springs which show setting tendency because of their size are pre-set within the production process.

# Prices

| Mennyiségi lépcsők | Egységár (EUR) |
|--------------------|----------------|
| 1                  | 14,9000 €      |
| 2                  | 11,8700 €      |
| 3                  | 7,7300 €       |
| 7                  | 5,7700 €       |
| 17                 | 4,1600 €       |
| 37                 | 3,5700 €       |
| 75                 | 3,5200 €       |
| 125                | 3,5200 €       |
| 175                | 3,5200 €       |
| 250                | 3,5200 €       |
| 350                | 3,5200 €       |