


05.2025

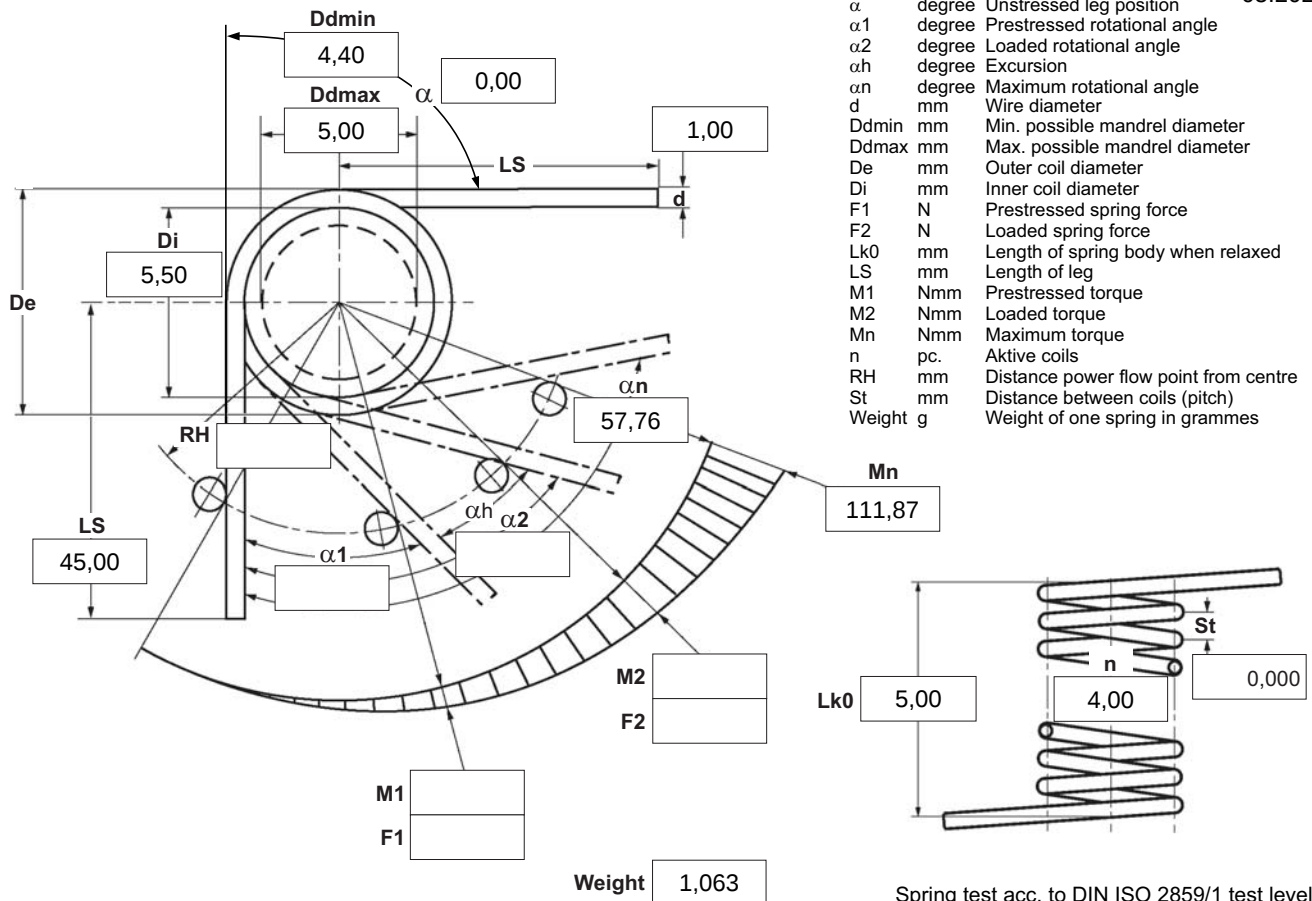

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☐ left ☒ right	5 Excursion αh degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td></td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td></td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐		2	☒	☒	☒	☒	☒		3	☐	☐	☐	☐	☐	☒
Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																								
1	☐	☐	☐	☐	☐																									
2	☒	☒	☒	☒	☒																									
3	☐	☐	☐	☐	☐	☒																								
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N	13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">A spring torque and the associated swing angle</td> <td style="width: 20%; text-align: center;">α ☒</td> </tr> <tr> <td rowspan="2">A spring torque and the associated swing angle and $\alpha 0$</td> <td style="text-align: center;">n, d ☐</td> </tr> <tr> <td style="text-align: center;">n, Di ☐</td> </tr> <tr> <td rowspan="2">Two spring resistances and the associated swing angle</td> <td style="text-align: center;">α, n, d ☐</td> </tr> <tr> <td style="text-align: center;">α, n, Di ☐</td> </tr> </table>	A spring torque and the associated swing angle	α ☒	A spring torque and the associated swing angle and $\alpha 0$	n, d ☐	n, Di ☐	Two spring resistances and the associated swing angle	α , n, d ☐	α , n, Di ☐																				
A spring torque and the associated swing angle	α ☒																													
A spring torque and the associated swing angle and $\alpha 0$	n, d ☐																													
	n, Di ☐																													
Two spring resistances and the associated swing angle	α , n, d ☐																													
	α , n, Di ☐																													
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. n /																													
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C 9 Material 1.4310																													
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut		11 Surface treatment 																												
Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%; text-align: right;">Mennyiségi lépcsők</td> <td style="width: 40%; text-align: left;">Egységár (EUR)</td> </tr> <tr> <td style="text-align: right;">1</td> <td>5,1100 €</td> </tr> <tr> <td style="text-align: right;">2</td> <td>3,6000 €</td> </tr> <tr> <td style="text-align: right;">3</td> <td>3,1300 €</td> </tr> </table>			Mennyiségi lépcsők	Egységár (EUR)	1	5,1100 €	2	3,6000 €	3	3,1300 €																				
Mennyiségi lépcsők	Egységár (EUR)																													
1	5,1100 €																													
2	3,6000 €																													
3	3,1300 €																													

Remarks

Származási ország: DE | Vámtarifaszám: 73202089

Grade	Di	LK0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076
1	☐	☐	☐	☐	☐	
2	☒	☒	☒	☒	☒	
3	☐	☐	☐	☐	☐	

13 Production compensation	through	
A spring torque and the associated swing angle	α	☒
A spring torque and the associated swing angle and $\alpha 0$	n, d	☐
	n, Di	☐
Two spring resistances and the associated swing angle	α, n, d	☐
	α, n, Di	☐

Prices	
Mennyiségi lépcsők	Egységár (EUR)
1	5,1100 €
2	3,6000 €
3	3,4300 €
7	2,2200 €
17	1,1200 €
37	0,7400 €
75	0,5500 €
125	0,4570 €
175	0,4069 €
250	0,3567 €
350	0,3095 €
450	0,2652 €