

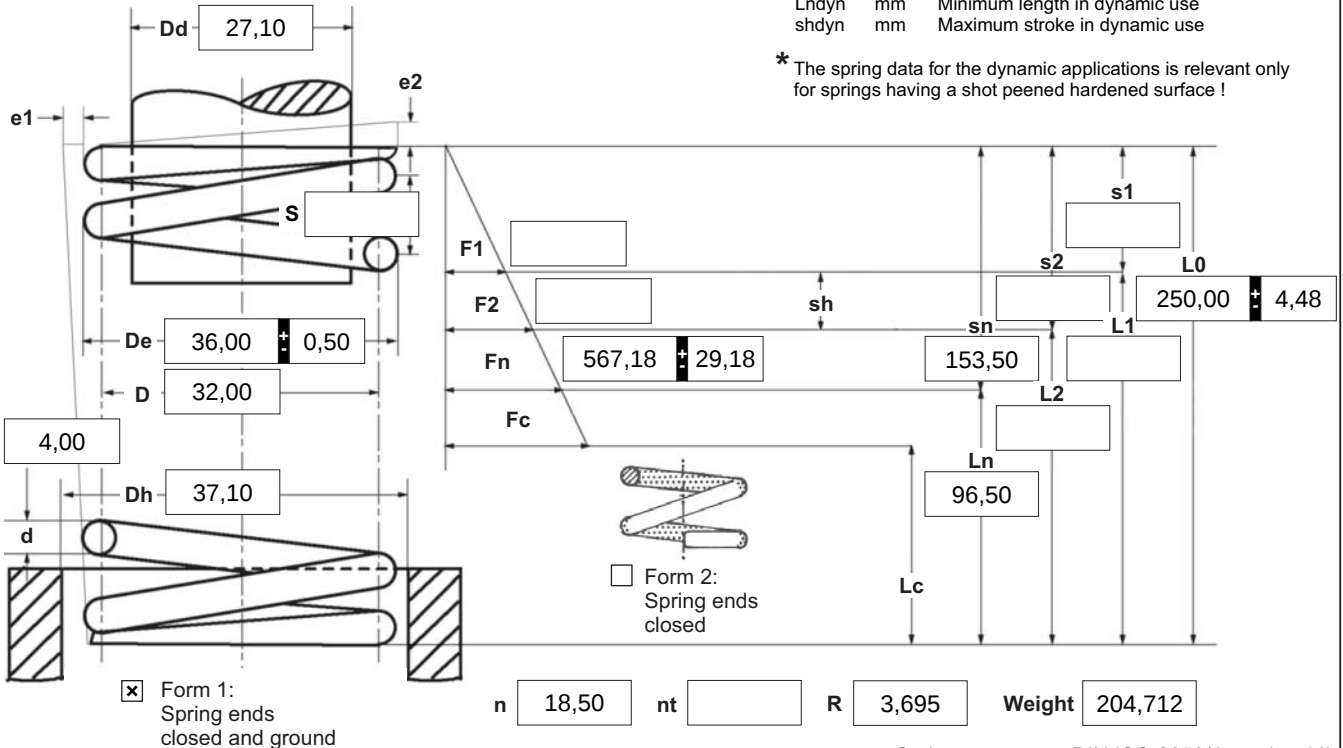
d mm Wire diameter
 D mm Mean coil diameter
 Dd mm Diameter of mandrel
 De mm Outer coil diameter
 Dh mm Diameter of bush
 e1 mm Perm.dev. perpendicular line
 e2 mm Perm.dev. parallel line
 F1 N Prestressed spring force
 F2 N Loaded spring force

F_n N Maximum force in static use
 F_c N Theoretic maximum force at L_c
 L0 mm Length of unstressed spring
 L1 mm Prestressed spring length
 L2 mm Loaded spring length
 L_k mm Buckling length
 L_n mm Minimum length in static use
 L_c mm Block length
 n pc. Active coils

nt pc. Total coils
 R N/mm Spring rate
 S mm Pitch (distance between coils)
 s1 mm Prestressed spring deflection
 s2 mm Loaded spring deflection
 sh mm Maximum stroke in static use
 sn mm Maximum spring deflection in static use
 Weight g Weight of one spring in grammes

F_{ndyn} N Maximum force in dynamic force
 F_{ndtol} N (+/-) tolerance of maximum dynamic force
 L_{ndyn} mm Minimum length in dynamic use
 sh_{dyn} mm Maximum stroke in dynamic use

* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

**1 Coiling direction**

☐ left ☒ right

2 Dynamic load *F_{ndyn} 501,43F_{ndtol} 28,71L_{ndyn} 114,30sh_{dyn} 24,86**3 Excursion sh** mm**4 Stress cyc. end. N****5 Stress cycle frequ. n** /**6 Application temp.** °C**Remarks**

Paese d'origine: DE | Numero della tariffa doganale: 73202081

7 Guidance and seat to DIN EN 13906-1☐ mandrel ☐ bushBuckling length **L_k** at

v=0,5 / Bild 5 198,44 mm

8 Material

1.4310

9 Wire or rod surface☒ drawn ☐ rolled ☐ metal-cut**10 Springs deburred** ☐ inside ☐ outside**11 Surface treatment** ☐ shot peened**12 Tolerances to DIN EN 15800**

Grade	De, Di, D	L0	F1, F2	e1, e2	Wire diameter d to DIN 2076
1	☐	☐	☐	☐	☐
2	☒	☒	☒	☒	☒
3	☐	☐	☐	☐	☒

13 Production compensation through

A spring resistance and associated length of tensed spring	L0	☐
A spring resistance, associated length of tensed spring and L0	n, d	☒
	n, De, Di	☐
Two spring resistances and associated lengths of tensed spring	L0, n, d	☐
	L0, n, De, Di	☐

14 Setting springs

All springs which show setting tendency because of their size are pre-set within the production process.

Prices

Quantità progressive	Prezzo singolo [EUR]
1	13,3600 €
2	10,6400 €
3	6,1500 €
7	4,0000 €
17	2,6100 €
37	2,2000 €
75	2,1400 €
125	2,1400 €
175	2,1400 €
250	2,1400 €
350	2,1400 €