



07.2025

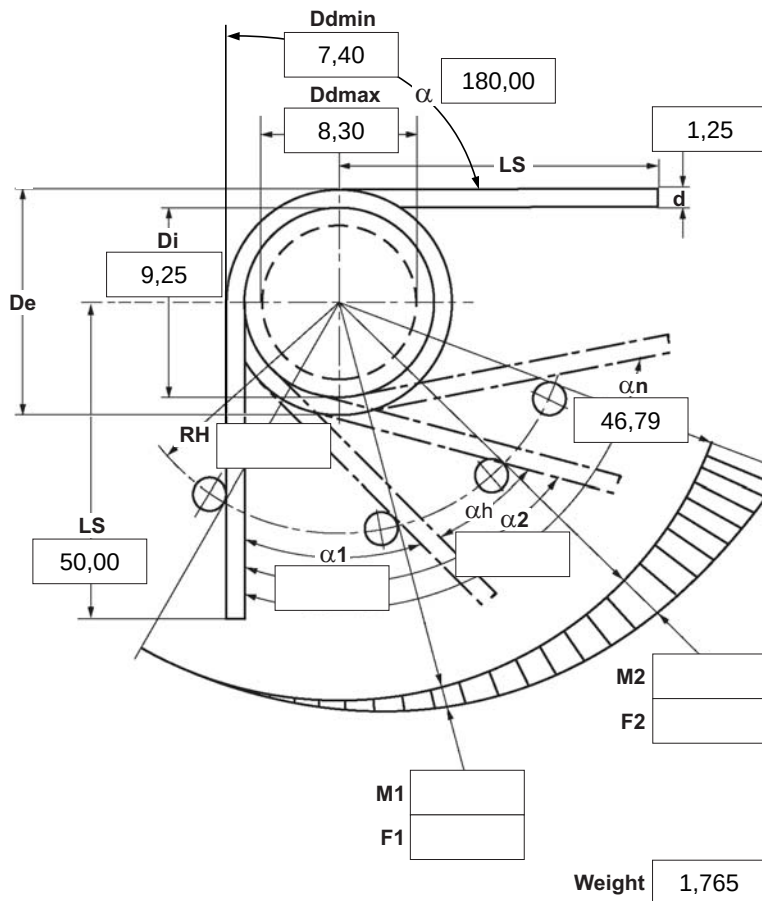

|            |        |                                       |
|------------|--------|---------------------------------------|
| $\alpha$   | degree | Unstressed leg position               |
| $\alpha_1$ | degree | Prestressed rotational angle          |
| $\alpha_2$ | degree | Loaded rotational angle               |
| $\alpha_h$ | degree | Excursion                             |
| $\alpha_n$ | degree | Maximum rotational angle              |
| d          | mm     | Wire diameter                         |
| Ddmin      | mm     | Min. possible mandrel diameter        |
| Ddmax      | mm     | Max. possible mandrel diameter        |
| De         | mm     | Outer coil diameter                   |
| Di         | mm     | Inner coil diameter                   |
| F1         | N      | Prestressed spring force              |
| F2         | N      | Loaded spring force                   |
| Lk0        | mm     | Length of spring body when relaxed    |
| LS         | mm     | Length of leg                         |
| M1         | Nmm    | Prestressed torque                    |
| M2         | Nmm    | Loaded torque                         |
| Mn         | Nmm    | Maximum torque                        |
| n          | pc.    | Active coils                          |
| RH         | mm     | Distance power flow point from centre |
| St         | mm     | Distance between coils (pitch)        |
| Weight     | g      | Weight of one spring in grammes       |

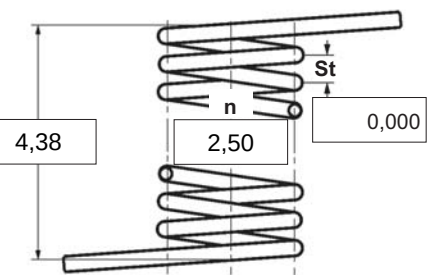

Spring test acc. to DIN ISO 2859/1 test level II

**1 Coiling direction**
☐ left ☒ right
**2 Form of legs**

tangential, straight, no bends \*



\*We can also supply torsion springs with any form of leg for an extra charge.

**3 Fixing**Recumbent leg ☐ Lever leg ☐**4 Load**
☐ in winding direction  
☐ against winding direction
**5 Excursion  $\alpha_h$**  degr.**6 Stress cyc. end. N****7 Stress cycle frequ. n** /**8 Application temp.** °C**9 Material**

1.4310

**10 Wire or rod surface**
☒ drawn ☐ rolled ☐ metal-cut
**11 Surface treatment****12 Tolerances to DIN 2194**

| Grade | Di                                  | Lk0                                 | LSH,LSR                             | $\alpha, \alpha_1, \alpha_2$        | M1,M2                               | Wire diameter d to DIN 2076         |
|-------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 1     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 2     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**13 Production compensation**

through

|                                                               |                  |                                     |
|---------------------------------------------------------------|------------------|-------------------------------------|
| A spring torque and the associated swing angle                | $\alpha$         | <input checked="" type="checkbox"/> |
| A spring torque and the associated swing angle and $\alpha_0$ | n, d             | <input type="checkbox"/>            |
|                                                               | n, Di            | <input type="checkbox"/>            |
| Two spring resistances and the associated swing angle         | $\alpha$ , n, d  | <input type="checkbox"/>            |
|                                                               | $\alpha$ , n, Di | <input type="checkbox"/>            |

**Prices**

| Grupa ilociowa | Cena jednostkowa [EUR] |
|----------------|------------------------|
| 1              | 5,1600 €               |
| 2              | 3,6400 €               |
| 3              | 3,4700 €               |
| 7              | 2,4200 €               |
| 17             | 1,1500 €               |
| 37             | 0,8500 €               |
| 75             | 0,6800 €               |
| 125            | 0,4859 €               |
| 175            | 0,4196 €               |
| 250            | 0,3695 €               |
| 350            | 0,3536 €               |
| 450            | 0,3284 €               |

**Remarks**

Kraj pochodzenia: DE | Numer taryfy celnej: 73202089