



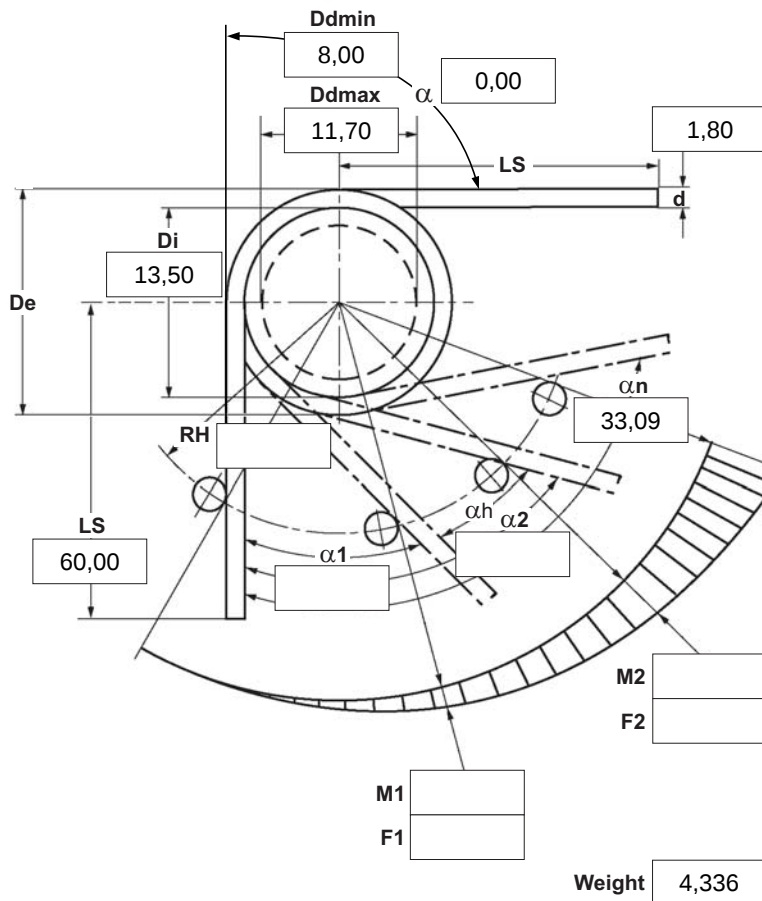

α	degree	Unstressed leg position
α_1	degree	Prestressed rotational angle
α_2	degree	Loaded rotational angle
αh	degree	Excursion
αn	degree	Maximum rotational angle
d	mm	Wire diameter
Ddmin	mm	Min. possible mandrel diameter
Ddmax	mm	Max. possible mandrel diameter
De	mm	Outer coil diameter
Di	mm	Inner coil diameter
F1	N	Prestressed spring force
F2	N	Loaded spring force
Lk0	mm	Length of spring body when relaxed
LS	mm	Length of leg
M1	Nmm	Prestressed torque
M2	Nmm	Loaded torque
Mn	Nmm	Maximum torque
n	pc.	Active coils
RH	mm	Distance power flow point from centre
St	mm	Distance between coils (pitch)
Weight	g	Weight of one spring in grammes

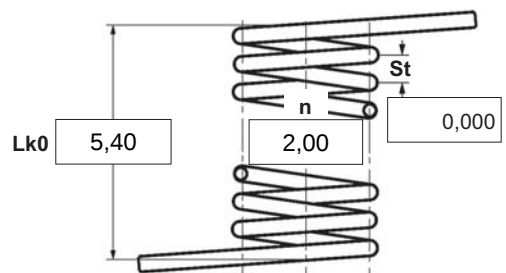

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☒  left ☐  right	5 Excursion <u>a_h</u> degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td></td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td></td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> </tbody> </table>		Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐		2	☒	☒	☒	☒	☒		3	☐	☐	☐	☐	☐	☒
Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																									
1	☐	☐	☐	☐	☐																										
2	☒	☒	☒	☒	☒																										
3	☐	☐	☐	☐	☐	☒																									
2 Form of legs tangential, straight, no bends *  *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. N	13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td>A spring torque and the associated swing angle</td> <td>α</td> <td>☒</td> </tr> <tr> <td>A spring torque and the associated swing angle and $\alpha 0$</td> <td>n, d</td> <td>☐</td> </tr> <tr> <td></td> <td>n, Di</td> <td>☐</td> </tr> <tr> <td>Two spring resistances and the associated swing angle</td> <td>α, n, d</td> <td>☐</td> </tr> <tr> <td></td> <td>α, n, Di</td> <td>☐</td> </tr> </tbody> </table>		A spring torque and the associated swing angle	α	☒	A spring torque and the associated swing angle and $\alpha 0$	n, d	☐		n, Di	☐	Two spring resistances and the associated swing angle	α , n, d	☐		α , n, Di	☐													
A spring torque and the associated swing angle	α			☒																											
A spring torque and the associated swing angle and $\alpha 0$	n, d	☐																													
	n, Di	☐																													
Two spring resistances and the associated swing angle	α , n, d	☐																													
	α , n, Di	☐																													
3 Fixing Recumbent leg Lever leg	7 Stress cycle frequ. n /	Prices <table style="width: 100%;"> <tr> <td style="width: 50%;">Desconto por quantidade</td> <td style="width: 50%;">Preço individual</td> </tr> <tr> <td>1</td> <td>[EUR]</td> </tr> <tr> <td>2</td> <td>5,2700 €</td> </tr> <tr> <td>3</td> <td>3,3200 €</td> </tr> </table>		Desconto por quantidade	Preço individual	1	[EUR]	2	5,2700 €	3	3,3200 €																				
Desconto por quantidade	Preço individual																														
1	[EUR]																														
2	5,2700 €																														
3	3,3200 €																														
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C	11 Surface treatment 																													
	9 Material 																														
	10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut																														

Remarks

País de origem: DE | Número de tarifa alfandegária: 73202089

Prices

Desconto por quantidade	Preço individual [EUR]
1	5,2700 €
2	3,7200 €
3	3,5400 €
7	2,5100 €
17	1,2200 €
37	0,9000 €
75	0,7300 €
125	0,5070 €
175	0,4444 €
250	0,4132 €
350	0,3853 €
450	0,3536 €