


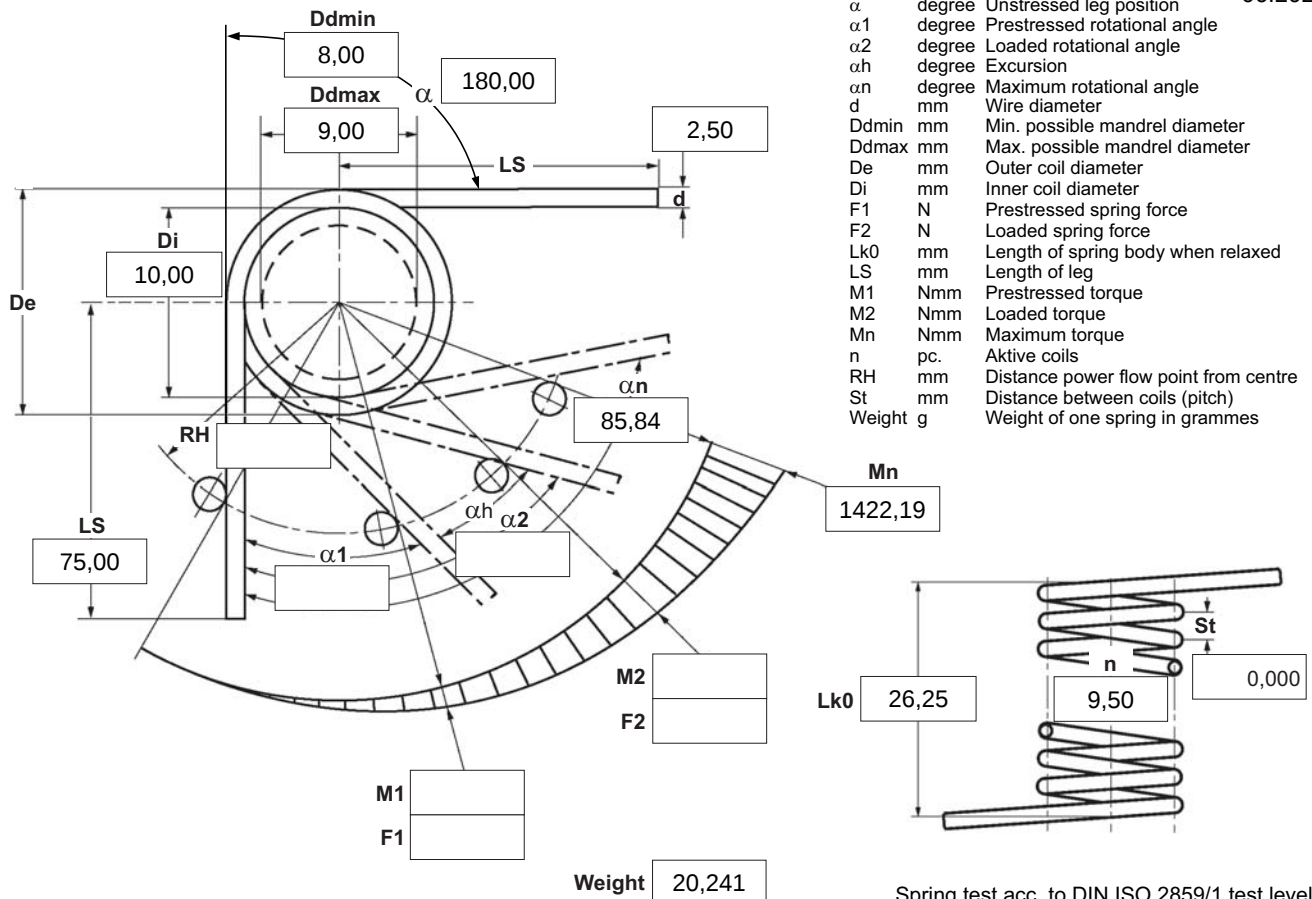

Spring test acc. to DIN ISO 2859/1 test level II

1 Coiling direction ☐ left ☒ right	5 Excursion <u>a</u> degr.	12 Tolerances to DIN 2194 <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th>Grade</th> <th>Di</th> <th>Lk0</th> <th>LSH,LSR</th> <th>$\alpha, \alpha 1, \alpha 2$</th> <th>M1,M2</th> <th>Wire diameter d to DIN 2076</th> </tr> <tr> <td>1</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td rowspan="3">☒</td> </tr> <tr> <td>2</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> <td>☒</td> </tr> <tr> <td>3</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> </table>	Grade	Di	Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076	1	☐	☐	☐	☐	☐	☒	2	☒	☒	☒	☒	☒	3	☐	☐	☐	☐	☐
Grade	Di		Lk0	LSH,LSR	$\alpha, \alpha 1, \alpha 2$	M1,M2	Wire diameter d to DIN 2076																					
1	☐		☐	☐	☐	☐	☒																					
2	☒	☒	☒	☒	☒																							
3	☐	☐	☐	☐	☐																							
2 Form of legs tangential, straight, no bends * *We can also supply torsion springs with any form of leg for an extra charge.	6 Stress cyc. end. <u>N</u>																											
3 Fixing Recumbent leg Lever leg 	7 Stress cycle frequ. <u>n</u> /																											
4 Load ☐ in winding direction ☐ against winding direction	8 Application temp. °C	13 Production compensation through <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">A spring torque and the associated swing angle</td> <td style="width: 50px; text-align: center;">α</td> <td style="width: 50px; text-align: center;">☒</td> </tr> <tr> <td rowspan="2" style="padding: 5px;">A spring torque and the associated swing angle and $\alpha 0$</td> <td style="text-align: center;">n, d</td> <td style="text-align: center;">☐</td> </tr> <tr> <td style="text-align: center;">n, Di</td> <td style="text-align: center;">☐</td> </tr> <tr> <td rowspan="2" style="padding: 5px;">Two spring resistances and the associated swing angle</td> <td style="text-align: center;">α, n, d</td> <td style="text-align: center;">☐</td> </tr> <tr> <td style="text-align: center;">α, n, Di</td> <td style="text-align: center;">☐</td> </tr> </table>	A spring torque and the associated swing angle	α	☒	A spring torque and the associated swing angle and $\alpha 0$	n, d	☐	n, Di	☐	Two spring resistances and the associated swing angle	α , n, d	☐	α , n, Di	☐													
A spring torque and the associated swing angle	α		☒																									
A spring torque and the associated swing angle and $\alpha 0$	n, d	☐																										
	n, Di	☐																										
Two spring resistances and the associated swing angle	α , n, d	☐																										
	α , n, Di	☐																										
9 Material 		Prices <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">Desconto por quantidade</td> <td style="width: 40%; text-align: right;">Preço individual</td> </tr> <tr> <td style="text-align: right;">1</td> <td style="text-align: right;">[EUR]</td> </tr> <tr> <td style="text-align: right;">2</td> <td style="text-align: right;">5,4200 €</td> </tr> <tr> <td style="text-align: right;">3</td> <td style="text-align: right;">3,8200 €</td> </tr> </table>	Desconto por quantidade	Preço individual	1	[EUR]	2	5,4200 €	3	3,8200 €																		
Desconto por quantidade	Preço individual																											
1	[EUR]																											
2	5,4200 €																											
3	3,8200 €																											
10 Wire or rod surface ☒ drawn ☐ rolled ☐ metal-cut		11 Surface treatment 																										
11 Surface treatment 																												

Remarks

País de origem: DE | Número de tarifa alfandegária: 73202089